



**Datasheet**

ENGLISH

# RS PRO PMMA Extruded Clear Plate

## 5mm thick x 500mm x 400mm

Stock No: 824-525




### Specifications:

Chemical designation	Acrylic (PMMA (Poly-methyl Methacrylate))
Colour	Clear
Density	1.19 g/cm <sup>3</sup>
Filler(s)	None

# Technical Specifications:

Mechanical Properties	Parameter	Value	Unit	Standard/Norm
Modulus of elasticity (tensile test)		3000 – 3300	Mpa	ISO 527
Tensile strength		72	Mpa	ISO 527
Elongation at break		4	%	ISO 527
Flexural strength		115	Mpa	ISO 178
Compression strength		110	Mpa	ISO 604
Impact strength		10 – 12	kJ/m <sup>2</sup>	ISO 179-1
Thermal properties	Parameter	Value	Unit	Standard/Norm
Heat Stability – Vicat B		105	°C	ISO 306
Forming Temperature		130-190	°C	
Service Temperature (MAX)		80	°C	
Thermal expansion (CLTE)		0.07	M/mm °C	ISO 11359-2
Specific heat		1.47	KJ/kg °C	ISO 11357-4
Thermal conductivity		0.17	W/m °C	DIN 52612
Electrical properties	Parameter	Value	Unit	Standard/Norm
Dielectric strength		20-25	kV/mm	DIN 53481
Volume Resistivity		10 <sup>15</sup>	Ohm*cm	DIN 53482
Other properties	Parameter	Value	Unit	Standard/Norm
Water Absorption	24h	0.3	%	ISO 62

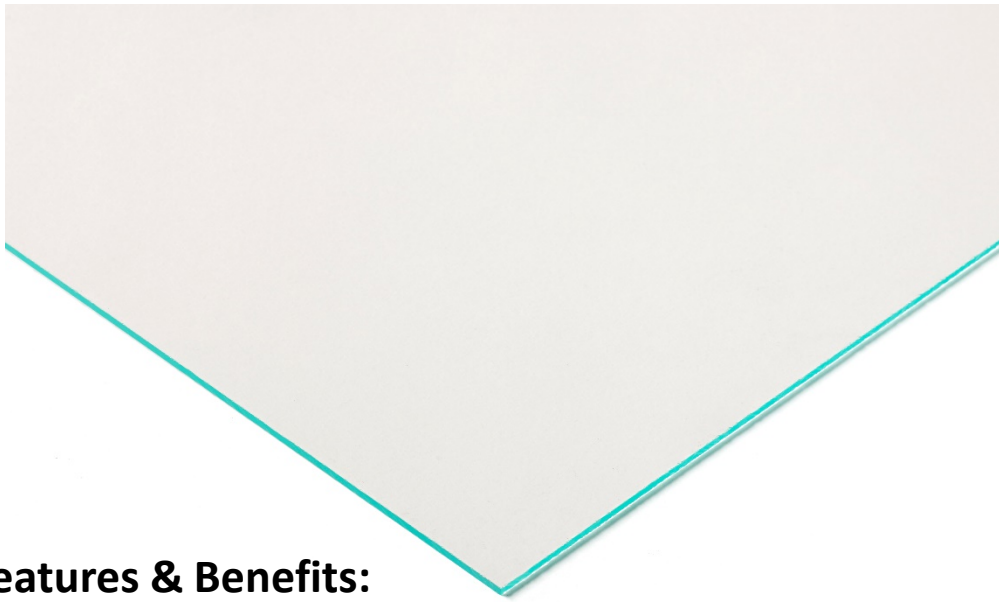

### **Features & Benefits:**

- **High impact strength**
- **UV resistance**
- **Good thermal stability**
- **Low water absorption**
- **Perfect transparency for displays**

### **Compliances:**

- **ISO 9001**
- **ROHS**
- **REACH**