





* UNLESS OTHERWISE SPECIFIED TOLERANCES ON DECIMAL IS: ANGLE \pm 1* UNIT: MM .XX \pm 0.35








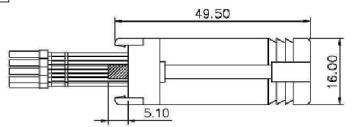






17.40





ORDERING INFORMATON:

| SIZE | P/N - KITTED | PRODUCT CODE |
|-------|--------------|--------------|
| 9-WAY | | |

ROHS Compliant

| NO. | Name | Description | |
|-----|----------|--|-----|
| 1 | Conn | Modular jack 10P8C Female, ABS, Black, Gold Flash Contac | t 1 |
| 2 | Hood | Metallized Hood | 1 |
| 3 | Screw | #4-40UNC Thumb Screw Nickel Plated | 2 |
| 4 | Wire | UL1061,26AWG,7 Stand Lead Wire | 8 |
| 5 | Terminal | D—SUB Female Terminal,Copper,Gold Plated | |
| 6 | Conn | Crimp Wire D—SUB Female 9pin Black Insulator | 1 |

| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MH CONNECTORS LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR | DRAWN Johnny | | DATE 02-2 | 7-17 |
|---|--------------------|--------------|--------------|-------------|
| THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | APPROVED Victor | | DATE 02-2 | 7-17 |
| | SCALE | SHEET 1 D | OF 1 | REV: 5,0 |
| | DRAWING No | | | |



Grey

Blue



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY.

7

8