




# Datasheet

## Stock No. 1863126

### RS PRO Connector Assembly



ENGLISH

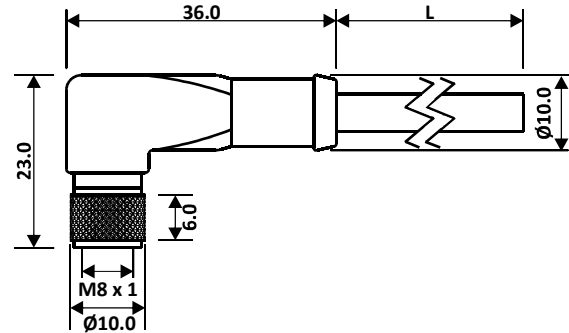

M08 Female Right Angle

All dimensions are in mm.

#### General Specification

Rated Operational Voltage	30 V
Current Rating	4A
Insulation Resistance	$\geq 100 \text{ M}\Omega$
Temperature Range	-25°C ... +75°C
Degree of Protection	IP67

#### Material Specification


Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Plated
Contact Carrier	Nylon 66
Grip Colour	Black
Coupling Nut	Brass Nickel-Plated

#### Cable Specification

Cable Length-L	2 m
Cable Type	4 Core PUR Multi Strand
Sheath Colour	Black
Cross Section of Wire	0.34 sq. mm
Core Dia	1.3 mm
Cable Dia	4.9 ± 0.1 mm
Termination	Partially Stripped

Specifications are subject to change without notice.

#### Pin Assignment



Type Approved  
Safety  
Regular Production  
Surveillance



www.tuv.com  
ID 1111210482

