


07S

kg 175-500

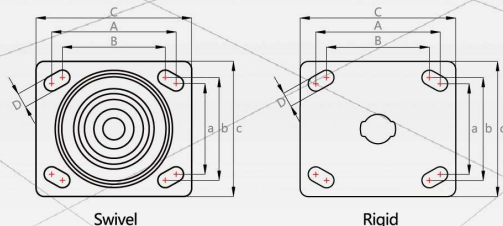

PU

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

★ Remark: Please refer to the standard of Zhongshan caster industry association.
















Wheel: Thermoplastic polyurethane (PU).

Wheel surface hardness: 98-100° Shore A.

Wheel core structure: polypropylene (PP).

Bearing: SUPO customization double ball bearing with iron dust-proof cover.

For more information please refer to page 304.

Swivel Top Plate		NO.										
Wheel Material	Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)	
  	(PU)	J07S-01-125-352	125(5")	45	300	164	104	149	 Double Ball Bearing	(C)115x100	(A)92x67 (B)76x76	(D)11
		J07S-01D-125-352										
		J07S-01C-125-352										
		J07S-04-125-352										
		J07S-01-150-352	150(6")		360	190	121	150				
		J07S-01D-150-352										
		J07S-01C-150-352										
		J07S-04-150-352										
		J07S-01-200-352	200(8")		430	240	158	172				
		J07S-01D-200-352										
		J07S-01C-200-352										
		J07S-04-200-352										

