



RS PRO Miniature Micro Switch

RS STOCK NUMBER - 2496852

FEATURES

- VERSATILE SWITCH SUITABLE FOR HEAVY DUTY APPLICATIONS.
- COMPATIBLE WITH ALL INDUSTRY STANDARD V3 SWITCHES.
- LONG MECHANICAL AND ELECTRICAL LIFE.
- CONFORM TO IEC 1508-1 STANDARD

CE / / APPROVED

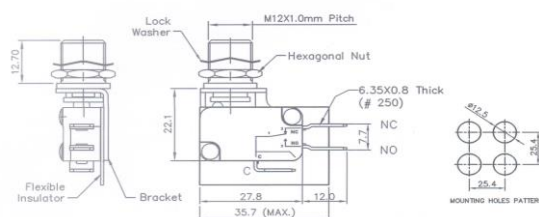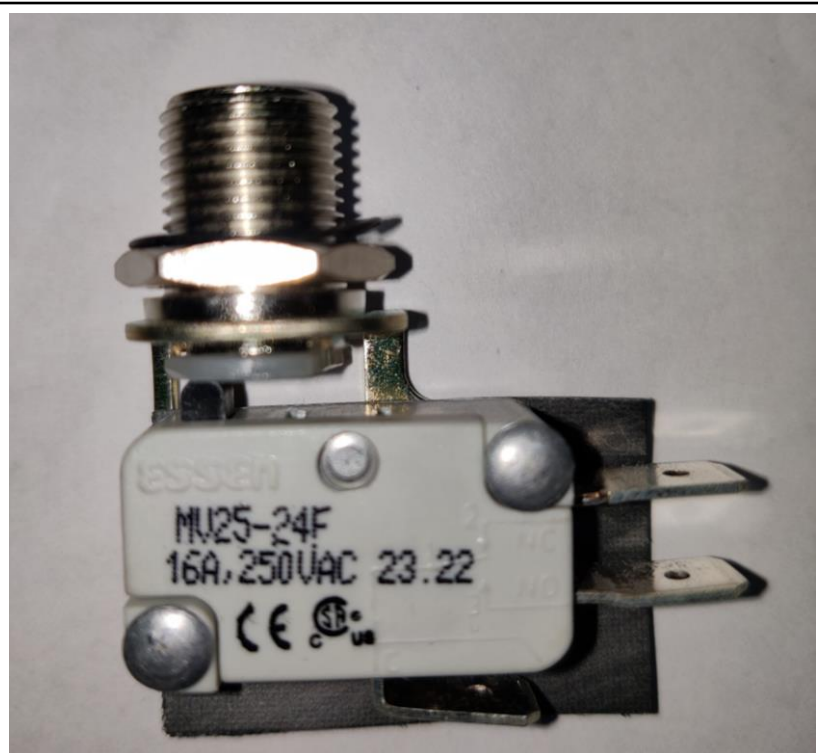

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description ATTRIBUTE 1

- *V3 switches are ideal for many heavy-duty applications including automotive vending machines, telecommunication equipment, security products and instrumentation, conveyors, machine tools.*
- *Single pole changeover.*
- *Positive snap action mechanism.*
- *Momentary action actuator, frame fitted with screwed sleeve, one plunger, one insulating sheet, one flexible insulator on one switch with two aluminium rivets which provides the means for single hole mounting.*
- *Quick connect terminals 6.35mm(#250).*
- *Long mechanical and electrical life.*
- *Fine silver contacts.*

General Specifications

Contact Configuration	SPDT.
Contact Arrangement	1No + 1NC, snap action.
Contacts	Pure silver, bi-metal, silver plated.
Terminals	Copper alloy, silver plated.
Plunger	Nylon.
Case	30% Glass filled flame retardant thermoplastic UL94 V0.
Salient Feature	Momentary action actuator and a screwed sleeve which provides the means for single hole mounting. 6.35X0.8mm quick-connect terminals.

Electrical Specifications

Electrical Rating		
	Load	Rating
	AC-15	16 Amp at 250V.
		5 Amp at 440V.
	DC-13	0.6 Amp at 110V (Resistive).
		0.3 Amp at 220V (Resistive).
		0.1 Amp at 110V (Inductive).
		0.05Amp at 220V (Inductive).
Contact Resistance		15 milliohms max. (initial).
Insulation Resistance		100 Megaohms (min.). at 500V DC.
Voltage Proof		1500V AC between each shorted terminal with body and 1000V AC between open contacts.

Electrical life	1,00,000 operations at 5A, 250V AC.
Mechanical life	10,00,000 operations.

Mechanical Specifications

Operating Force (OF)	400gms. (max).
Release Force(RF)	80 gms.(min.).
Pretravel (PT)	1.2 mm. (max.).
Movement Differential (MD)	0.4 mm. (max.).
Cut out size	Ø12.5 mm. (max.).
Centre distance between two Adjacent Units	25.4 mm. (min.).
Mounting	Single-hole mounting require a single clearance hole of 12.5mm diameter. Two locknuts provided.
Unit Weight	18.9 gms. Approx.

Operation Environment Specifications

Operating Temperature Range	-55°C to + +85°C.
------------------------------------	-------------------

Protection Category

IP Rating	IP40(enclosure).
------------------	------------------

Approvals

Compliance/Certifications	 CE/ c us/ UK/ CA.
----------------------------------	--