


## Datasheet

# RS PRO E-Glass Fibre Webbing

Stock No: 2035135

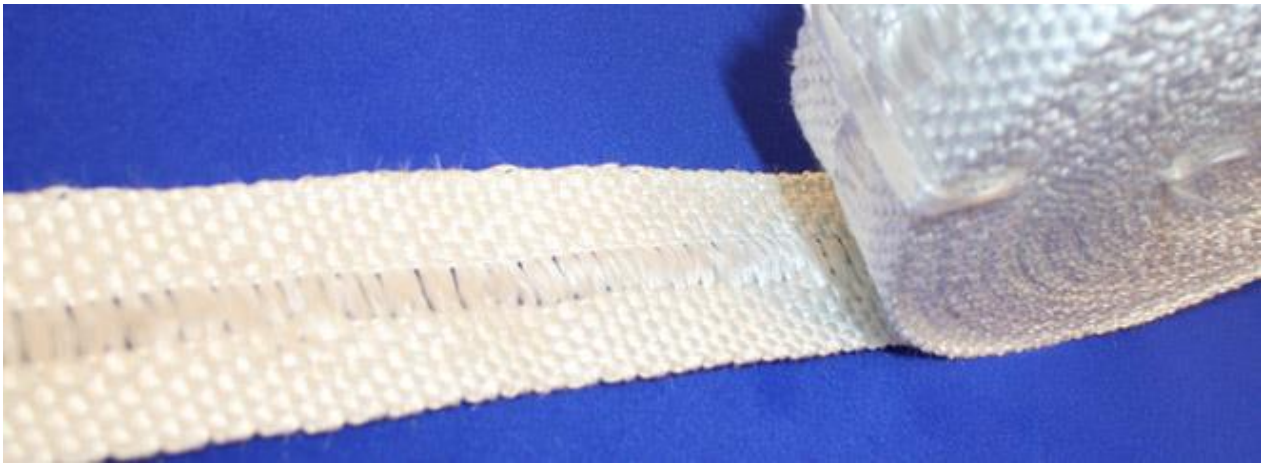

## Technical Specifications:

Average Density	600 – 800 kg/m <sup>3</sup>
Colour	White
Continuous Use Limit	550°C
Melting Point	840°C

## Features & Benefits:

- Perforations in tape for bolts
- Excellent chemical stability
- Resists attack from most corrosive agents
- Wide range of applications including
  - Insulation of gas and steam turbines
  - Insulation Linings
  - Wrapping of exhausts
  - Flange jointing

**E-Glass tape is made from texturized, continuous E-glass fibre filaments up to a maximum of 9 microns. These fibres cause considerably less irritation of the skin than coarser fibres.**