


Datasheet

Fibre Optic Cable Assembly

RS Stock number 536-8143



Dimensions: (mm)

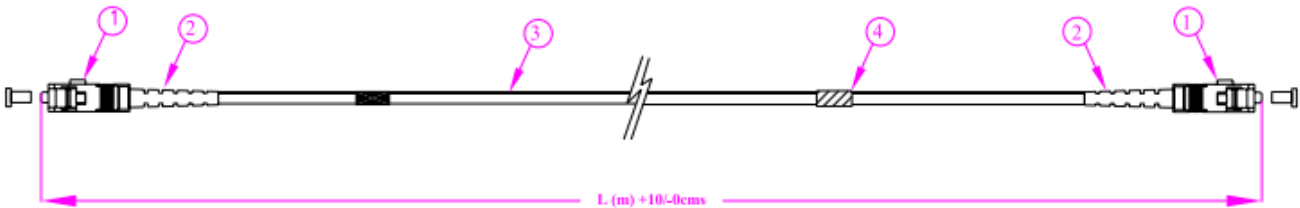

No.	Description	Ea
1	E2000 Connector	1
2	E2000 Boot	1
3	SC Connector	1
4	SC Boot	1
5	Identification Label	1
6	2.8mm Simplex Cable	1

Specification

Optical Performance: (IEC 61300-3-4)
 Multimode: (@1300nm)
 Max. IL – 0.30dB Typical: 0.20dB
 Singlemode: (@1310nm and/ or 1550nm)
 E-2000: Max. IL – 0.30dB Typical 0.20dB
 Return Loss: > 50dB
 LC Max IL – 0.30dB typical: 0.20dB
 Return Loss: > 50dB
 RoHS Compliant
 Coiling Diameter of the Patchcord shall be greater than 200mm