


RoHS  
Compliant



## Specifications

Product name	: Self-closing braided wrap
Material	: Polyester
Working temperature	: -40°C to +125°C
Low temperature resistance	: No crack and degradation after test at -40°C for 4h
Short-term aging	: No crack and degradation after test at 158°C for 168h
Melting point	: 240±10°C
Flammability	: Conform to class V-2 refer to UL94
Abrasion resistance	: Conform to grade D (1000-4999 cycles) refer to SAE J2192
Colour	: Black
Application	: Widely used in electronics, electrical appliances, automation equipment and computer wire.
Cutting tool	: Hot knife
Standard package (m/R)	: 25

## Diagram

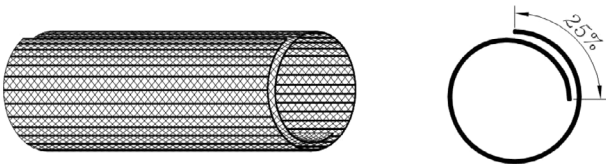

Dimensions : Millimetres

## Part Number Table

Description	ID	Overlap	Spread width	Part Number
Cable Sleeving, Self Closing Braided Wrap, Black, 25m	19	25%	86-90	MP009016
Cable Sleeving, Self Closing Braided Wrap, Grey, 25m				MP009017
Cable Sleeving, Self Closing Braided Wrap, Black, 25m	25		112-117	MP009019
Cable Sleeving, Self Closing Braided Wrap, Grey, 25m				MP009018

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
sg.element14.com/b/multicomp-pro