

Datasheet

# IEC Mineral Insulated Thermocouples with PFA Lead

Types 'K' or 'J' with 1 metre PFA Lead & Bare Tails – Stainless Steel Sheath



(Note: Illustration shows Type 'K')

- Mineral insulated Thermocouple to IEC 584
- Choice of Type 'K' with 310 stainless steel sheath or Type 'J' with 321 stainless steel sheath
- Highly flexible, sheath can be bent/formed to suit many applications and processes
- Insulated hot junction
- Plain pot seal (200°C)
- 1 metre 7/0.2mm PFA Teflon® insulated flat pair cable and tails (colour coded to IEC 584)
- Manufactured using materials to IEC 584 class 1 specification

## Specifications

Sensor type:	Type 'K' (Nickel Chromium/Nickel Aluminium) Type 'J' (Iron/Constantan)
Construction:	Flexible mineral insulated probe with stainless steel sheath, plain pot seal & 1 metre extension cable
Manufactured:	Tolerances of materials used in the manufacture conform to class 1 specification to relevant BS EN 60584 standards.
Element/hot junction:	Single element, junction insulated from sheath (offers protection against spurious electrical signals)
Termination:	1 metre 7/0.2mm PFA Teflon® insulated flat pair cable, colour coded in accordance with IEC 584
Probe temperature range:	Type 'K'            -40°C to +1100°C >1.0mm diameter -40°C to +750°C – 1.0mm diameter and below Type 'J'            -40°C to +750°C
Pot seal rating:	200°C

**Type 'K' – 310 stainless steel sheath:**

Good corrosion & oxidation resistance to suit a wide range of processes, satisfactorily operates in sulphur bearing atmospheres

Typical applications include brick & cement kilns, glass industry, heat treatment & annealing furnaces, power stations, flues, heat exchangers etc.

<b>T/C Type</b>	<b>Probe Dia. (mm)</b>	<b>Probe Length (mm)</b>	<b>Cable jacket</b>	<b>Tails: +pos/-neg</b>	<b>Allied code</b>	<b>RS order code</b>
K	1.0	150	Green	Green/White	70653203	<b>787-7696</b>
K	1.0	250	Green	Green/White	70653205	<b>787-7706</b>
K	1.0	500	Green	Green/White	70653206	<b>787-7709</b>
K	1.0	1000	Green	Green/White	70653204	<b>787-7703</b>
K	1.0	1500	Green	Green/White	70653207	<b>787-7712</b>
K	1.0	2000	Green	Green/White	70653208	<b>787-7715</b>
K	1.5	150	Green	Green/White	70643843	<b>397-1236</b>
K	1.5	250	Green	Green/White	70643844	<b>397-1258</b>
K	1.5	500	Green	Green/White	70653209	<b>787-7719</b>
K	1.5	1000	Green	Green/White	70653212	<b>787-7728</b>
K	1.5	1500	Green	Green/White	70653210	<b>787-7721</b>
K	1.5	2000	Green	Green/White	70653211	<b>787-7725</b>
K	3.0	150	Green	Green/White	70643845	<b>397-1264</b>
K	3.0	250	Green	Green/White	70643846	<b>397-1270</b>
K	3.0	500	Green	Green/White	70653214	<b>787-7734</b>
K	3.0	1000	Green	Green/White	70653215	<b>787-7737</b>
K	3.0	1500	Green	Green/White	70653213	<b>787-7731</b>
K	4.5	150	Green	Green/White	70653216	<b>787-7740</b>
K	4.5	250	Green	Green/White	70653217	<b>787-7743</b>
K	4.5	500	Green	Green/White	70653218	<b>787-7747</b>
K	4.5	1000	Green	Green/White	70653220	<b>787-7756</b>
K	6.0	150	Green	Green/White	70643847	<b>397-1286</b>
K	6.0	250	Green	Green/White	70643848	<b>397-1292</b>
K	6.0	500	Green	Green/White	70653221	<b>787-7759</b>
K	6.0	1000	Green	Green/White	70653219	<b>787-7753</b>

**Type 'J' – 321 stainless steel sheath:**


Excellent corrosion resistance, retains good ductile properties to suit a wide range of industrial applications & processes

Typical applications include heat treatment & annealing furnaces, aluminium heat treatment, chemical reactors, plastic/rubber moulding industry, polythene manufacture, coal plants, paper mills, textile industry etc.


<b>T/C Type</b>	<b>Probe Dia. (mm)</b>	<b>Probe Length (mm)</b>	<b>Cable jacket</b>	<b>Tails +pos/-neg</b>	<b>Allied code</b>	<b>RS order code</b>
J	1.5	150	Black	Black/White	70644364	<b>455-4270</b>
J	1.5	250	Black	Black/White	70644365	<b>455-4286</b>
J	3.0	150	Black	Black/White	70644366	<b>455-4292</b>
J	3.0	250	Black	Black/White	70644367	<b>455-4309</b>
J	6.0	150	Black	Black/White	70644368	<b>455-4315</b>
J	6.0	250	Black	Black/White	70644369	<b>455-4321</b>

# Stainless Steel Compression Glands – Parallel, Tapered & M16 Thread

(BSP, BSPT, M16)

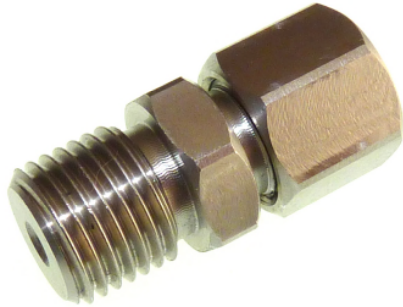

(BSP parallel example - 381-7362, see below for other sizes)

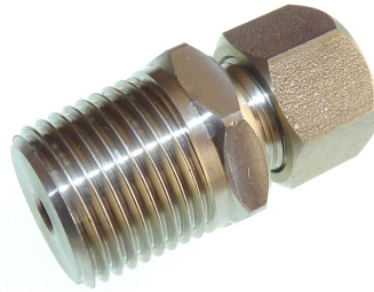

(BSPT tapered example – 286-787, see below for other sizes)

- Thermocouple installation fittings
- To suit a wide range of mineral insulated and other probe type sensors offered by RS
- Male in-line stainless steel compression type with nut & olive
- 1/8", 1/4", & 1/2" BSP parallel or BSPT tapered threads available. 1/2" M16 thread also available.
- Suits 1.0mm, 1.5mm, 3.0mm, 4.0mm, 4.5mm, 6.0mm, 8.0mm, 1/8", 1/4" or 3/16" probe diameters
- Stainless steel locknuts also available (see below)

## BSP Parallel:

Type	Thread Size	Thread Type	Suits Probe Ø	Allied code	RS order code
St/Steel	1/8"	BSP Parallel	1.0mm	70654828	<b>804-7975</b>
St/Steel	1/8"	BSP Parallel	1.5mm	70643728	<b>381-7334</b>
St/Steel	1/8"	BSP Parallel	3.0mm	70643729	<b>381-7340</b>
St/Steel	1/8"	BSP Parallel	4.0mm	70657784	<b>839-9566</b>
St/Steel	1/8"	BSP Parallel	4.5mm	70657785	<b>839-9569</b>
St/Steel	1/8"	BSP Parallel	6.0mm	70643730	<b>381-7356</b>
St/Steel	1/8"	BSP Parallel	1/4"		<b>110-4476</b>
St/Steel	1/8"	BSP Parallel	1/8"	70657782	<b>839-9557</b>
St/Steel	1/8"	BSP Parallel	3/16"	70657783	<b>839-9563</b>
St/Steel	1/4"	BSP Parallel	3.0mm	70643731	<b>381-7362</b>
St/Steel	1/4"	BSP Parallel	4.5mm	70657786	<b>839-9572</b>
St/Steel	1/4"	BSP Parallel	6.0mm	70643732	<b>381-7378</b>
St/Steel	1/4"	BSP Parallel	1/4"	70657787	<b>839-9575</b>
St/Steel	1/4"	BSP Parallel	3/16"	70657779	<b>839-9547</b>
St/Steel	1/2"	BSP Parallel	3.0mm	70657788	<b>839-9579</b>
St/Steel	1/2"	BSP Parallel	4.5mm	70657791	<b>839-9588</b>
St/Steel	1/2"	BSP Parallel	6.0mm	70643735	<b>381-7407</b>
St/Steel	1/2"	BSP Parallel	8.0mm	70657789	<b>839-9581</b>

## BSPT Tapered:

Type	Thread Size	Thread Type	Suits Probe Ø	Allied code	RS order code
------	-------------	-------------	---------------	-------------	---------------

St/Steel	1/8"	BSPT Tapered	1.0mm	70654831	<b>804-7984</b>
St/Steel	1/8"	BSPT Tapered	1.5mm	70637825	<b>286-743</b>
St/Steel	1/8"	BSPT Tapered	3.0mm	70636461	<b>158-610</b>
St/Steel	1/8"	BSPT Tapered	4.5mm	70637826	<b>286-759</b>
St/Steel	1/8"	BSPT Tapered	6.0mm	70657792	<b>839-9591</b>
St/Steel	1/8"	BSPT Tapered	1/4"		<b>110-4475</b>
St/Steel	1/8"	BSPT Tapered	1/8"	70657793	<b>839-9594</b>
St/Steel	1/8"	BSPT Tapered	3/16"	70657794	<b>839-9597</b>
St/Steel	1/4"	BSPT Tapered	3.0mm	70643733	<b>381-7384</b>
St/Steel	1/4"	BSPT Tapered	4.5mm	70657796	<b>839-9604</b>
St/Steel	1/4"	BSPT Tapered	6.0mm	70643734	<b>381-7390</b>
St/Steel	1/4"	BSPT Tapered	1/4"	70657797	<b>839-9608</b>
St/Steel	1/4"	BSPT Tapered	1/8"	70657795	<b>839-9601</b>
St/Steel	1/4"	BSPT Tapered	3/16"	70657790	<b>839-9585</b>
St/Steel	1/2"	BSPT Tapered	3.0mm	70657777	<b>839-9541</b>
St/Steel	1/2"	BSPT Tapered	4.5mm	70637828	<b>286-787</b>
St/Steel	1/2"	BSPT Tapered	6.0mm	70637829	<b>286-793</b>
St/Steel	1/2"	BSPT Tapered	8.0mm	70657780	<b>839-9550</b>
<b>M16</b>					
St/Steel	1/2"	M16	3.0mm	70657800	<b>839-9617</b>
St/Steel	1/2"	M16	6.0mm	70657798	<b>839-9610</b>
St/Steel	1/2"	M16	8.0mm	70657799	<b>839-9614</b>

**Stainless Steel locknuts also available:**



<b>Thread</b>	<b>Allied code</b>	<b>RS order code</b>
S/Steel 1/8" BSPP	70651759	<b>762-1180</b>
S/Steel 1/4" BSPP	70651760	<b>762-1184</b>
S/Steel 1/2" BSPP	70651762	<b>762-1193</b>

# Brass Compression Glands – Parallel, Tapered & NPT Thread

BSP, BSPT & NPT



- Thermocouple installation fittings
- To suit a wide range of mineral insulated and other probe type sensors offered by RS
- Male in-line brass compression type with nut & olive
- 1/8" & 1/4" BSP parallel thread to suit 1.5, 3.0, 4.0, 4.5 & 6.0mm. 3/16 also available.
- 1/2", 1/4" & 1/8" BSPT tapered thread to suit 1.5mm, 3.0mm, 4.5mm, 6.0mm, 1/8" & 3/16"
- Brass locknuts also available

## BSPP Parallel:

Type	Thread Size	Thread Type	Suits Probe Ø	Allied code	RS order code
Brass	1/8"	BSP Parallel	1.5mm	70657765	<b>839-9496</b>
Brass	1/8"	BSP Parallel	3.0mm	70643725	<b>381-7277</b>
Brass	1/8"	BSP Parallel	4.0mm	70657764	<b>839-9490</b>
Brass	1/8"	BSP Parallel	4.5mm	70657766	<b>839-9500</b>
Brass	1/8"	BSP Parallel	6.0mm	70657768	<b>839-9507</b>
Brass	1/8"	BSP Parallel	3/16	70657767	<b>839-9503</b>
Brass	1/4"	BSP Parallel	3.0mm	70643727	<b>381-7306</b>
Brass	1/4"	BSP Parallel	4.5mm	70657770	<b>839-9519</b>
Brass	1/4"	BSP Parallel	3/16	70657769	<b>839-9513</b>

## BSPT Tapered:

Brass	1/8"	BSPT Tapered	1.5mm	70637822	<b>286-715</b>
Brass	1/8"	BSPT Tapered	3.0mm	70637823	<b>286-721</b>
Brass	1/8"	BSPT Tapered	4.5mm	70637824	<b>286-737</b>
Brass	1/8"	BSPT Tapered	6.0mm	70657773	<b>839-9529</b>
Brass	1/8"	BSPT Tapered	1/8	70657771	<b>839-9522</b>
Brass	1/8"	BSPT Tapered	3/16	70657772	<b>839-9525</b>
Brass	1/4"	BSPT Tapered	3.0mm	70657774	<b>839-9531</b>
Brass	1/4"	BSPT Tapered	6.0mm	70657778	<b>839-9544</b>
Brass	1/4"	BSPT Tapered	1/4mm	70657776	<b>839-9538</b>
Brass	1/4"	BSPT Tapered	3/16	70657775	<b>839-9535</b>
Brass	1/2"	BSPT Tapered	6.0mm	70657781	<b>286-771</b>

## NPT

Brass	1/8"	NPT	1.5mm	70657781	<b>839-9553</b>
-------	------	-----	-------	----------	-----------------

## Brass locknuts also available:

Thread	Allied code	RS order code
Brass 1/8" BSPP	70651756	<b>762-1171</b>
Brass 1/4" BSPP	70651757	<b>762-1174</b>
Brass 1/2" BSPP	70651758	<b>762-1178</b>

