


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	03.08.03'
②	BACKGROUND FORMAT UPDATED	10.23.08'
③	$\phi 21.0 \rightarrow \phi 20.0$ WORKING VOLTAGE \rightarrow VOLTAGE RATING DEL. PROOF VOLTAGE	03.20.14'

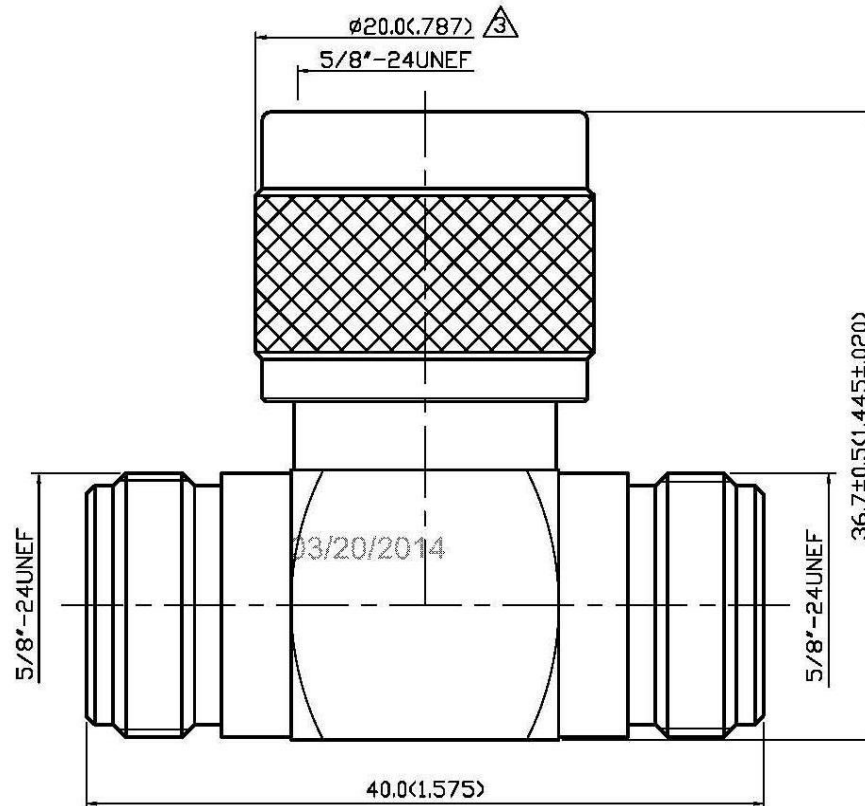

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 1000 VOLTS MAX. ③

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -85° C TO +185° C

9	BODY II	BRASS	1	NICKEL 100 μ " MIN.
8	CHASSIS	BRASS	1	NICKEL 100 μ " MIN.
7	CENTER CONTACT II	BRASS	1	GOLD
6	CENTER CONTACT I	BRASS	1	GOLD
5	WASHER	BRASS	1	NONE
4	INSULATION	TEFLON	3	NONE
3	GASKET	SILICONE	1	RED
2	BODY I	BRASS	1	NICKEL 100 μ " MIN.
1	SHELL	BRASS	1	NICKEL 100 μ " MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED

by _____ DATE: _____



DESCRIPTION		N T ADAPTER JACK-PLUG-JACK	
製圖	DRAWN	TOLERANCE	品名
	Yoko	X ±0.2	11-27 T.G.N
檢圖	CHECK	XX ±0.1	UNIT
	Arc	XXX ±0.05	mm(in)
認定	APPROVAL	ANGLE ±5°	SCALE
	Angela		3:1
TITLE		\ ROHS COMPLIANT <50 μ >	
DWG.NO.		11-0231	
DATE	07.02.98'	版次	A-3