

FEATURES

- 4, 5-way Variants
- Insulation Resistance $\geq 100 \text{ M}\Omega$
- Neoprene O-Ring
- Brass nickel plated coupling nut

RS PRO M12 FEMALE STRAIGHT USER-WIRE 5 PIN PG9 WITH BRASS BODY SCREW TERMINALS B-CODED

RS Stock No.: 2080559



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to

the leading brands without paying a premium price.

Product Description ATTRIBUTE 1

M12 female cable connector

M12 series 5-poles female circular shielded connector has a socket connection. This connector has a voltage rating of 60V and a current rating is up to 4A per contact. The screw-on connectors mate with cable mount plugs and receptacles with a positive lock feature and quick-connect and disconnect capabilities. This connector also features a screw locking mating system that ensures a secure connection. This compact connector is ideal for use in challenging conditions.

Features and Benefits:

- 4, 5-way Variants
- Insulation Resistance $\geq 100 \text{ M}\Omega$
- Neoprene O-Ring
- Re-Wireable –no special tooling required
- Brass nickel plated coupling nut

General Specifications

Rated Operational Voltage	60 V
Current Rating	4A
Insulation Resistance	$\geq 100 \text{ M}\Omega$
Temperature Range	-25°C ... +75°C
Coding	B-Coded

Material Specifications

Grip Material	Brass Nickel-plated
Contact	Cu-Zn
Contact Plating	Nickel-plated
Contact Carrier	Nylon 66
O-Ring	Neoprene + NBR
Housing Color	Silver
Termination	Screw (1 Sqmm Max.)
Pole	5
Cable Gland	6 - 8 mm (PG9)
Coupling Nut	Brass Nickel-Plated

Protection Category

Degree of Protection	IP67
----------------------	------

Additional Information

Custom Tariff Number	85369090
----------------------	----------


Approvals

Standards Met	IEC 61076-2-101
---------------	-----------------

Similar Products

Stock No.	Brand	Product Name	Attribute 1	Attribute 2
-	-	-	-	-

Connection Diagrams / Assembly Diagrams / Illustrations / Accessories

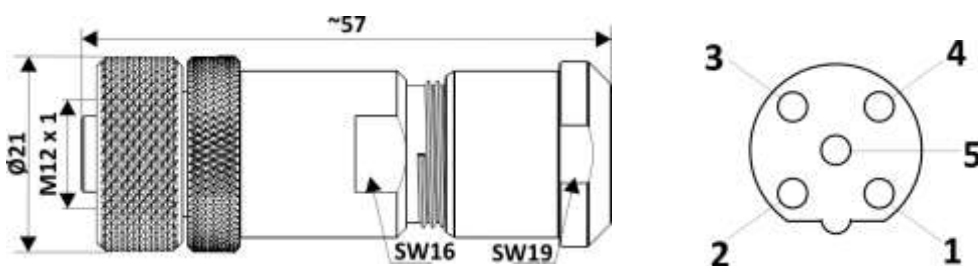

All Dimensions are in mm.

Assembly Instruction

