


NO	DESCRIPTION	DATE
⚠	-65° C TO +125° C → -40° C TO +70° C	07.05.12'
⚠	50 → 75 DEL. PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	12.31.14'

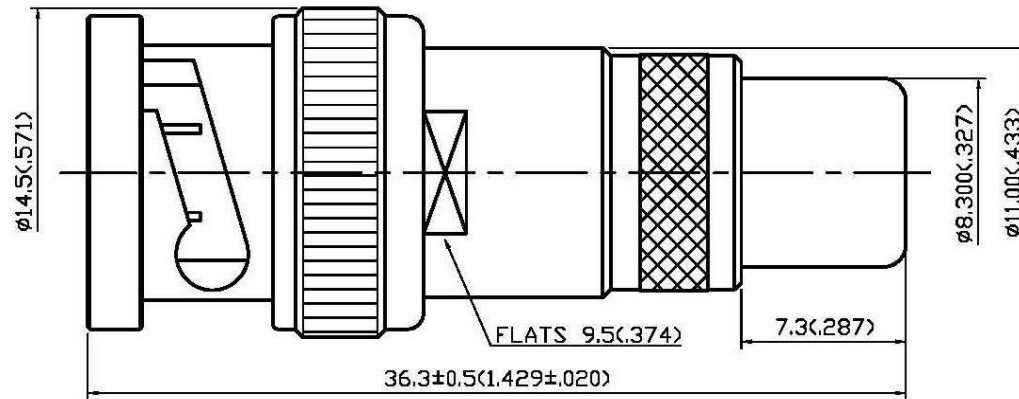

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-250 MHz
 1.2 NOMINAL IMPEDANCE: 75 OHM
 1.3 VOLTAGE RATING: 500 VOLTS MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
 2.2 CENTER CONTACT: BRASS PER JIS-C3604
 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -40° C TO +70° C

9	INSULATION II	TEFLON	1	NONE
8	CENTER CONTACT	BRASS	1	GOLD
7	BODY	BRASS	1	NICKEL 100μ" MIN.
6	WASHER	BRASS	1	NICKEL 100μ" MIN.
5	SPRING WASHER	SK-5	1	NICKEL
4	WASHER	BRASS	1	NICKEL
3	GASKET	SILICONE	1	RED
2	INSULATION I	TEFLON	1	NONE
1	SHELL	BRASS	1	NICKEL 100μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED

by _____ DATE: _____



DESCRIPTION		STRAIGHT BNC PLUG - RCA JACK ADAPTER							
製圖	DRAWN	TOLERANCE	品名	13-46-1	T.G.N	日期	DATE	版次	REV.
	<i>Kristina</i>			.X					
檢圖	CHECK	單位	UNIT	DWG.NO. 13-0190					
	<i>Arc</i>			.XX	±0.1	mm(in)			
認定	APPROVAL	比例	SCALE						
	<i>Angela</i>			ANGLE	±5°	4:1			