

## Datasheet

# RS PRO UL1015 Red, 0.2 mm<sup>2</sup> Hook Up Wire, 100m

Stock No: 2075290



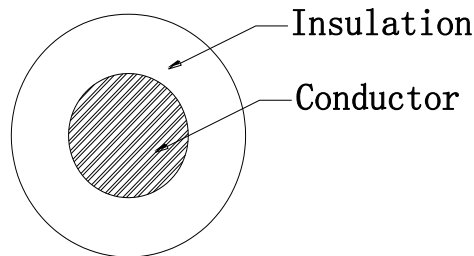
## Technical Specifications:



Conductor	Tinned Copper
Cores Number	1C
Size(AWG)	24AWG
Construction( $\pm 0.008$ mm)	7/0.20
Stranded Dia.(mm)	0.60
Insulation Material	PVC
Insulation Color	Red (RAL3018)
Ave Thickness(mm)	0.81
Min Thickness(mm)	0.65
Insulation Dia.( $\pm 0.10$ mm)	2.24

## Features & Benefits:

- **Rated temperature: 105 °C**
- **Conductor resistance(20°C Ω/km): 84.6Max.**
- **Insulation DC Resistance(20°C MΩ\*Km): 200Min.**
- **Rated Voltage: 600V**

## Cross Section drawings



**Cable Marking:** E254881  AWM STYLE 1015 24AWG  
105°C 600V VW-1  AWM I A 105°C 600V FT1 -LF- -F-  
ELETECK

**Applications:** It is designed for general applications, for internal appliance wiring