




ALASKA 200 START 230V 12-24V

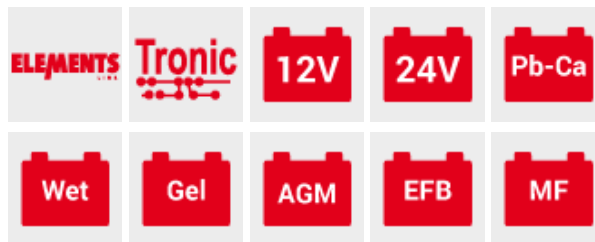

Overview

ALASKA 200 START 230V 12-24V

cod. 807577

Battery charger and maintainer with electronic control of the charging current, automatic interruption and restart (TRONIC), for charging lead-acid batteries with 12/24V voltage of motorcycles, vehicles, vans, light trucks.

Charge options: normal CHARGE, BOOST quick charge, automatic TRONIC charge and maintenance of WET,GEL,AGM: SPIRAL,MF, START-STOP batteries.

Features:

- choice of CHARGE, TRONIC mode
- visualization of charging current (CHARGE)
- warning LED to indicate battery charge status, end of charge, maintenance (TRONIC)
- choice of outputvoltage, charge voltage, start
- protection against overloads and polarity reversal.

Technical data

CODE	CODE 807577	A_{EFF}	EFFECTIVE CHARGING CURRENT 25 / 12 A		ADJUSTMENT POSITIONS 2
V_{1PH}	SINGLE PHASE MAINS VOLTAGE 230 V	A_{EN}	RATED CHARGE CURR. EN60335-2-29 15 / 8 A		DIMENSIONS 24,5 - 19,5 - 13 cm
F	MAINS FREQUENCY 50 / 60 Hz	A_{IV/C}	START CURRENT 1V/C EN60335-2-29 100 A		WEIGHT 7,57 kg
P_{CHARGE}	CHARGE POWER 0,3 KW	A_{START MAX}	MAX STARTING CURRENT 150 A	BAR CODE	EAN CODE 800489794849 2
P_{START}	START POWER 2,2 KW	C_{MIN}	MIN. RATED REFERENCE CAPACITY 25 / 30 Ah		PIECES/PALLET 72 pz/pallet



ALASKA 200 START 230V 12-24V



CHARGING VOLTAGE 12 / 24 V



MAX RATED REFERENCE CAPACITY
300 / 160 Ah