


75 Ω coaxial cable

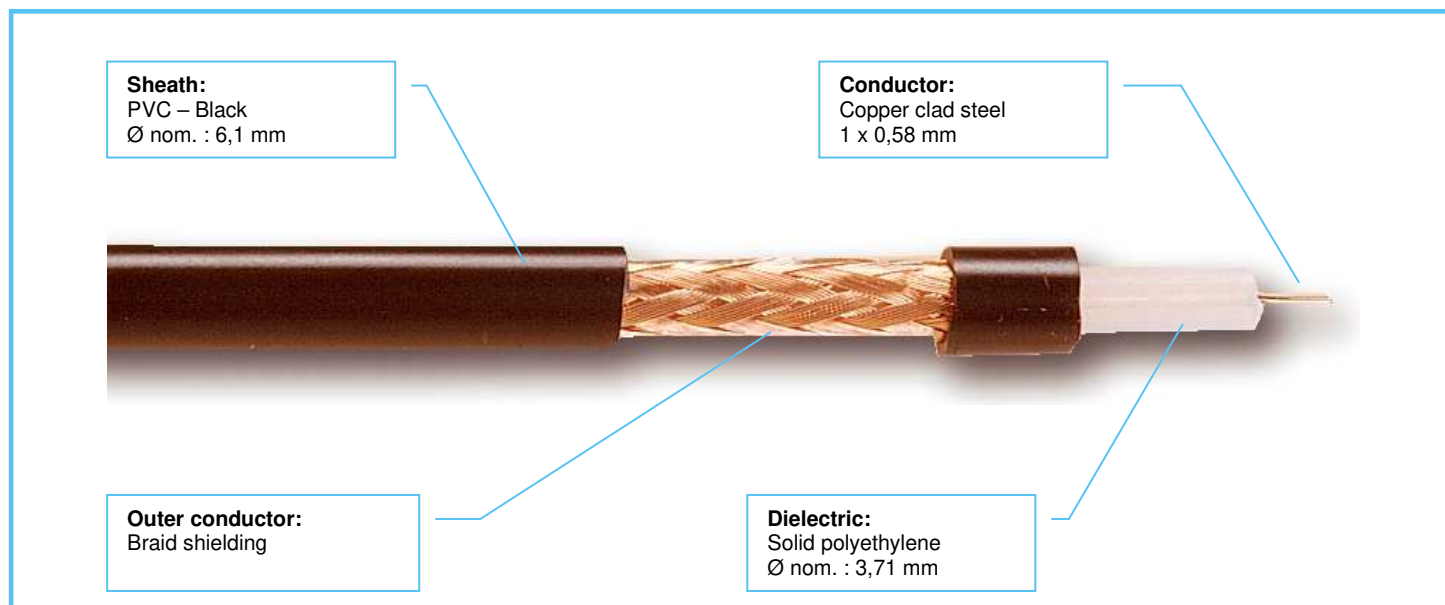

PRODUCTS INFORMATIONS

Application

These cables are used for signal transmissions, in analogical video and video surveillance applications.

Electrical properties

Characteristic impedance at 200 MHz:	75 Ω
Nominal capacity (800 Hz – 1 KHz):	67 pF/m
Insulation resistance at 20°C:	> 5000 MΩ.km
Dielectric strength at 50Hz:	> 5000 V
Electrical resistance – inner conductor:	< 238 Ω/km
Velocity of propagation:	66 %
Nominal attenuation:	
F (MHz)	dB/100m
400	29
1000	47

Characteristics



Temperature range:
- 10°C → + 70°C



Minimum bending radius:
60 mm



According to RoHS Standard



Flame behaviour :
EN 50575 :2014+A1 :2016, Class Eca