

Customization

01 series

03S series

05S series

07S series

08 series

09C series

10 series

11 series

12 series

13 series

17 series

20 series

21 series

23 series

24 series

27series

28 series

30 series


35 series

43 series

F02 series

L01 series

43  **83-155**

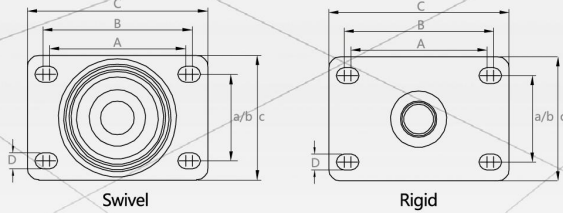

PA







Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

Wheel: Nylon (PA) molding in one body
Wear resistance, impact resistance.

Wheel surface hardness: 70-75°Shore D.

Bearing: SUPO customization single ball bearing with dust-proof cover.

* Remark: Please refer to the standard of Zhongshan caster industry association.

Swivel Top Plate	Wheel Material	NO.	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)
	(PA)	X43-01-75-612	75(3")	32	125	105	70	112.5		(C)98x65	(A)71x45 (B)78x45	(D)8.5
		X43-01A-75-612										
		X43-04-75-612										
	(PA)	X43-01-100-612	100(4")	32	140	130	82.5	112.5		(C)98x65	(A)71x45 (B)78x45	(D)8.5
		X43-01A-100-612										
		X43-04-100-612										
	(PA)	X43-01-125-612	125(5")	32	155	156	95	115.5		(C)98x65	(A)71x45 (B)78x45	(D)8.5
		X43-01A-125-612										
		X43-04-125-612										