MHN-TD

MHN-TD 150W/842 RX7s 1CT/12

Double-ended guartz Metal-halide lamp

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Operating and Electrical		
Cap-Base	RX7S [RX7s]	Power Consumption	155.0	
Operating Position	P45 [Parallel +/-45D or Horizontal(HOR)]	Voltage (Nom)	98 V	
Flux measurement reference	Sphere	Voltage (Nom)	98 V	
Life to 50% Failures (Nom)	10,500 hour(s)			
		Controls and Dimming		
Light Technical		Dimmable	No	
Color Code	842 [CCT of 4200K]			
Luminous Flux	12,500 lm	Mechanical and Housing		
Color Designation	Cool White (CW)	Bulb Finish	Clear TD	
Chromaticity Coordinate X (Nom)	0.371	Bulb Shape		
Chromaticity Coordinate Y (Nom)	0.366			
Correlated Color Temperature (Nom)	4200 K	Approval and Application		
Luminous Efficacy (Rated) (Min)	73 lm/W	Energy Efficiency Class	G	
Luminous Efficacy (rated) (Nom)	81 lm/W	Mercury (Hg) Content (Max)	12.3 m	
Color rendering index (CRI)	81	Mercury (Hg) Content (Nom)	12.3 m	
Arc Length O (Nom)	17.8 mm	Energy Consumption kWh/1000 h	155 kV	

data subject to change

Operating and Electrical	
Power Consumption	155.0 W
Voltage (Nom)	98 V
Voltage (Nom)	98 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	TD
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	12.3 mg
Mercury (Hg) Content (Nom)	12.3 mg
Energy Consumption kWh/1000 h	155 kWh

A ↑ G G






Lighting

MHN-TD

20	EPREL Registration Number
	Product Data
-TD 150W/842 RX7s 1CT/12	Order product name
-TD 150W/842 RX7s 1CT/12	Full product name
9121536300	Full product code
76505190	Order code


Material Nr. (12NC)	928076505190		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8718291215363		
Numerator - Packs per outer box	12		
EAN/UPC - Case	8718291215370		


Dimensional drawing

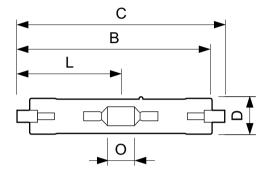


Product	D (max)	D	0	C (max)
MHN-TD 150W/842 RX7s 1CT/12	23.0 mm	0.89 inch	17.8 mm	135.4 mm

Photometric data

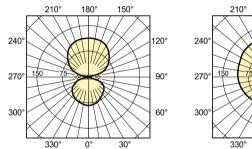





Light Distribution Diagram - MHN-TD 150W/842 RX7s 1CT/12

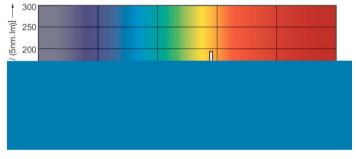

Spectral Power Distribution Colour - MHN-TD 150W/842 RX7s 1CT/12

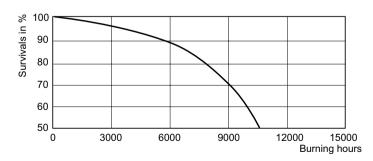

Life Expectancy Diagram - MHN-TD 150W/842 RX7s 1CT/12

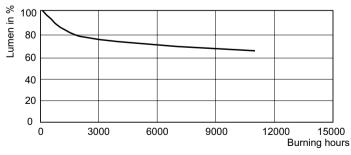

Lumen Maintenance Diagram - MHN-TD 150W/842 RX7s 1CT/12

Lifetime

MHN-TD



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, November 23 - data subject to change