




Datasheet


RS PRO XT30PW Male PCB dedicated horizontal connector

Stock number: 180-5359

EN

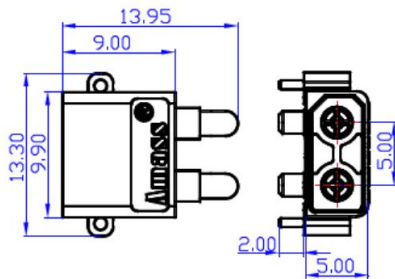

Section

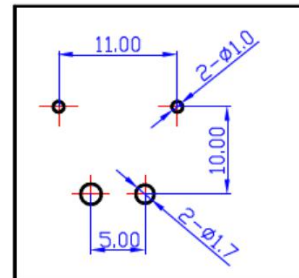

Installation hole diagram

Material & Parameter

Recommend USE :Battery/charger/controller

Color: Yellow

Metal Material: Brass Gold Plated

Plastic Material: PA

FR Level: UL94 V0

Cable Spec: PCB

Certification: UL

Contact Resistance: 0.80mΩ

Rated Voltage: DC 500V

Rated Current: 15A

Momentary Current: 30A

Use Times: 1000 TIMES

Use Temperature: -20°C to 120°C

Remark: Data sheet will change according with the test background