

Datasheet

RS PRO UL11028 Red, 5.2 mm² Hook Up Wire, 30.5m

Stock No: 6877685



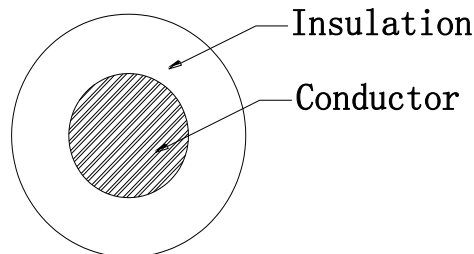
Technical Specifications:



Conductor	Tinned Copper
Cores Number	1C
Size(AWG)	10AWG
Construction(± 0.008 mm)	105/0.25
Stranded Dia.(mm)	3.00
Insulation Material	MPPE
Insulation Color	Red
Ave Thickness(mm)	0.30
Min Thickness(mm)	0.24
Insulation Dia.(± 0.15 mm)	3.66

Features & Benefits:

- **Temperature Range: -40 to 105 °C**
- **Conductor resistance(20°C Ω/km): 3.54Max.**
- **Rated Voltage: 600V**

Cross Section drawings



Cable Marking: E254881  AWM STYLE 11028 10AWG
105°C 600V VW-1 c  AWM I A 105°C 600V FT1 -LF- -
HF- ELETECK

Applications: Hook up wire is frequently used in control panels, automotive, meters, ovens, internal wiring of computers, electronic equipment, business machines and appliances.