Stands

DIMENSIONS

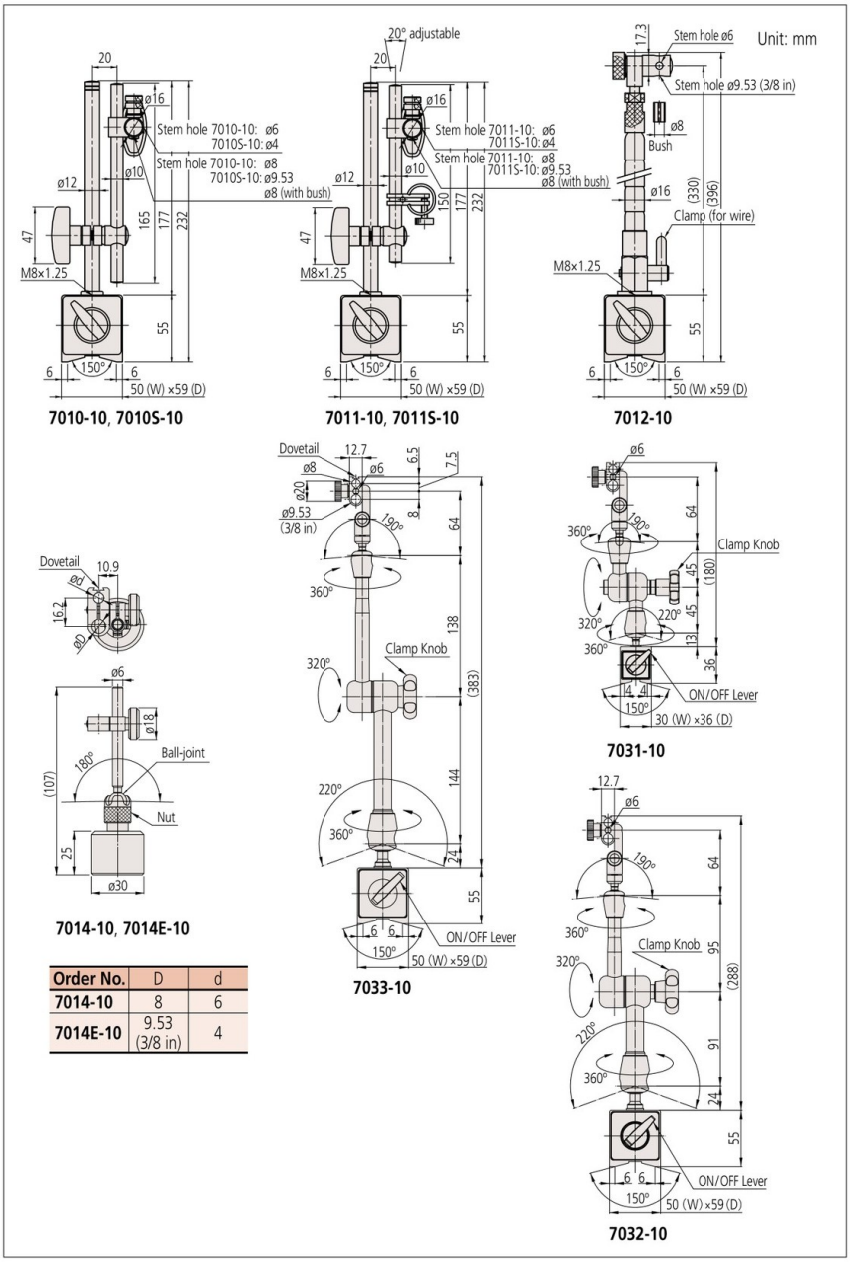

Order No.	D	d
7014-10	8	6
7014E-10	9.53 (3/8 in)	4

SPECIFICATIONS

Order No.	Description	Applicable holding stem sizes	Magnetic force*1	Remarks
7010-10*2*3	Magnetic stand	ø6 mm, ø8 mm	Approx. 600 N	—
7010S-10*2*3	Magnetic stand	ø4 mm, ø8 mm, ø9.53 mm (3/8 in)	Approx. 600 N	—
7011-10*2*3	Magnetic stand	ø6 mm, ø8 mm	Approx. 600 N	With fine adjustment
7011S-10*2*3	Magnetic stand	ø4 mm, ø8 mm, ø9.53 mm (3/8 in)	Approx. 600 N	With fine adjustment
7012-10*4	Magnetic stand	ø6 mm, ø8 mm, ø9.53 mm (3/8 in)	Approx. 600 N	—
7014-10*4	Mini magnetic stand	ø6 mm, ø8 mm, with dovetail	Approx. 150 N	Without magnet ON/OFF
7014E-10*2*3	Mini magnetic stand	ø4 mm, ø9.53 mm (3/8 in)	Approx. 150 N	Without magnet ON/OFF
7031-10	Universal magnetic stand	ø6 mm, ø8 mm, ø9.53 mm (3/8 in), with dovetail	Approx. 300 N	With mechanical locking system
7032-10	Universal magnetic stand	ø6 mm, ø8 mm, ø9.53 mm (3/8 in), with dovetail	Approx. 600 N	With mechanical locking system
7033-10	Universal magnetic stand	ø6 mm, ø8 mm, ø9.53 mm (3/8 in), with dovetail	Approx. 600 N	With mechanical locking system

*1 The magnetic holding force applies to that needed for vertical separation from a thick and flat steel object.
*2 Back plunger type (**1160A**, etc.) cannot be attached.
*3 When attaching a compact dial indicator (outer frame diameter 31, 36 or 40 mm), select a back cover type with a lug.
*4 Use with a dial test indicator or SERIES 1 dial indicator (compact or lightweight type) is recommended.

F

Mitutoyo reserves the right to change any or all aspects of any product specification, including prices, designs and service content, without notice.

Dial Gage Stands
SERIES 7

- A convenient supporting stand for enabling a dial indicator to be used for comparative height or thickness measurements.
- Anvil: ø58 mm for **7001-10**, **7002-10** 90×90 mm for **7007-10**.
- Vertical fine adjustment is available with one-touch control thanks to the parallel spring suspension.

7001-10
(with ø58 mm serrated anvil)

7002-10
(with ø58 mm non-serrated anvil)

7007-10
(with 90 mm square semi-serrated anvil)

F

Mitutoyo reserves the right to change any or all aspects of any product specification, including prices, designs and service content, without notice.