



ENGLISH

Datasheet


Stock No. 1444057~144062,1444279~1444348,1731616~17,1731197~98 (see details below)

RS PRO 5.08mm Pitch Rising Clamp Terminal Blocks



Product Details

- 2-12 pole solid block
- Pluggable male-female connectors
- Open & closed headers
- Horizontal & vertical female plug styles
- Polarised mouldings
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 1.5mm² (28-14AWG) solid & stranded cable
- Anti solder wicking
- UL & VDE approved  us approved

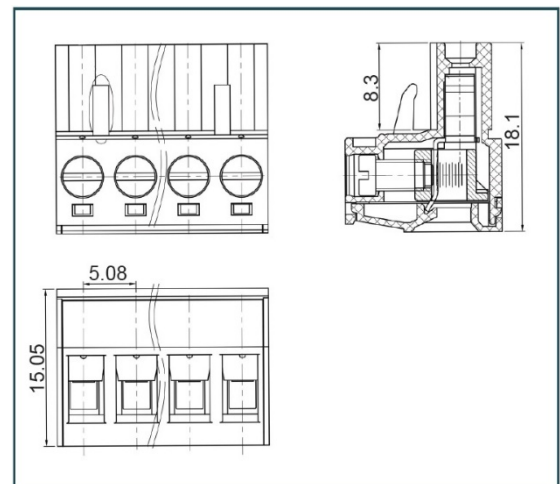

SPECIFICATION	
Rating	UL=15A/300V, VDE=20A/450V
Insulation resistance	500MΩ/500V
Withstand voltage	AC 2000V/1min
Contact resistance	20mΩ(max)
Working temperature	-40°C to +105°C
Moulding	UL94-V0, flame retardant PA66
Pin/terminal	Brass, tin plated
Rising clamp	Brass, Ni plated
Screw	M3 steel, zinc plated/0.5Nm
Recommended PCB hole	ø1.7mm

RS Stock No.	POLE	LENGTH
1444315	2	10.2mm
1444057,1444325	3	15.2mm
1444058,1444332	4	20.3mm
1444059,1444338	5	25.4mm
1444060,1444343	6	30.5mm
1444061,1444279	7	35.6mm
1444062,1444284	8	40.6mm
	9	45.7mm
	10	50.8mm
1731197,1731616	12	61mm
1731198,1731617	16	81.3mm