



Datasheet

RS PRO 2m IEEE 488 M&F - IEEE 488 M&F Parallel Extension Cable - Round Grey


Stock number: 182-8902

EN

Our RS PRO 2m IEEE 488 male and female to IEEE 488 male and female is wire pin to pin has a grey PVC cable flex.

The cable flex has an outer diameter of 10.7mm and 26awg, the connectors have gold flash pins to help stop corrosion.

This cable is most likely to be used with industrial equipment and some test equipment.

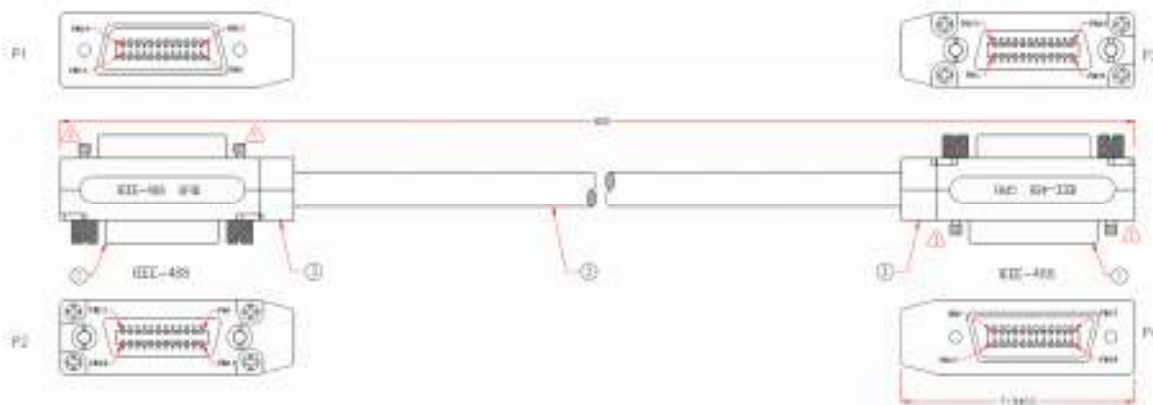

	P1	P2	P3	P4
BROWN	1	1	1	1
BROWN/WHITE	13	13	13	13
RED	2	2	2	2
RED/WHITE	14	14	14	14
ORANGE	3	3	3	3
ORANGE/BLACK	15	15	15	15
PINK	4	4	4	4
PINK/BLACK	16	16	16	16
YELLOW	5	5	5	5
BLACK/WHITE	17	17	17	17
GREEN	6	6	6	6
GREEN/WHITE	18	18	18	18
LIGHT GREEN	7	7	7	7
LIGHT GREEN/BLACK	19	19	19	19
BLUE	8	8	8	8
BLUE/WHITE	20	20	20	20
LIGHT BLUE	9	9	9	9
LIGHT BLUE/BLACK	21	21	21	21
PURPLE	10	10	10	10
PURPLE/WHITE	22	22	22	22
GREY	11	11	11	11
GREY/BLACK	23	23	23	23
SHIELD	12	12	12	12
YELLOW/BLACK	24	24	24	24
SHIELD	SHIELD	SHIELD	SHIELD	SHIELD

3	COPPER FOIL 7.5*35mm
	IEEE-488 MOLTEN HOOD
2	UL2464 12 TWISTED PAIRS 26AWG, ALUM-MYLAR AND COPPER BRAID FOIL FOIL SHIELDING WITH DRIAN WIRE, OD 10.7mm, JACKET SAND WITH A GREENISH CAST.DRAWING NO:EMAB2612P-731
1	IEEE-488, MALE AND FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR

RoHS / REACH / CE