

FEATURES

- Various probe diameters and lengths offered in this range.
- 'Re-Wireable' miniature flat pin plug
- Fast response, welded exposed junction
- Good temperature resistance

RS PRO Type K Thermocouple 10m Length, 1/0.3mm Diameter → +350°C

RS Stock No.: 872-2610



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



Product Description

From RS PRO, comes a range of type K and J glass fibre exposed thermocouples. With a probe that has been constructed with glass fibre for added flexibility, strength and easy to use, these thermocouples are a fantastic solution for temperature measurement.

General Specifications

Thermocouple Type	Type K
Temperature Measurement Range	−60°C to +350°C
Construction	Glass fibre insulated flat pair cable
Measuring Junction	Welded exposed junction
Accuracy	0.5 to 5.0°C(typical)
Application	General purpose. High temperature Oxidizing environment, Medical - research into DNA and hypodermic insertion to detecting a tumour, Temperature readings in boilers, heating sensors, and ovens


Mechanical Specifications

Probe Diameter	1/0.3mm
Probe Length	10m
Probe Body Material	Glass fibre
Insulation / Sheath Material	Glass fibre insulated flat pair cable
Termination Type	Miniature Plug
Compensating Cable Length	10m
Cable Insulation	Glass fibre

Approvals

Compliance/Certifications	IEC 584
Standards Met	IEC



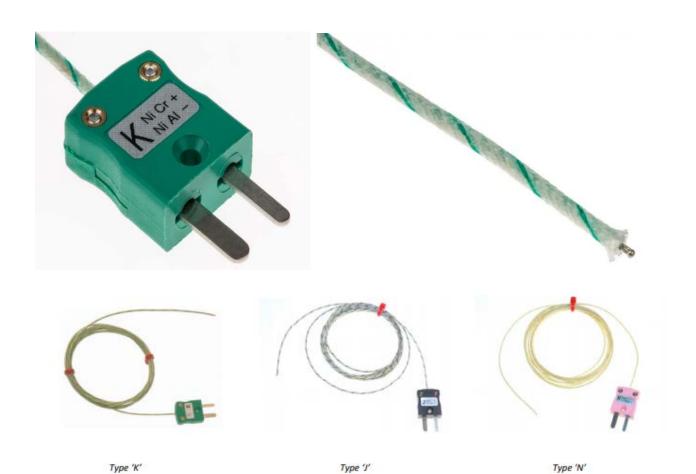

T/C Type	Conductors	Length	Termination	+Positive tail wire	-Negative tail wire code	Allied Code	RS order Code
'K' 'K' 'K' 'K'	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Green Green Green Green	White White White White	70643600	363-0250 110-4482 123-6306 123-6307
')' ')' ')'	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Black Black Black Black	White White White	70643599	363-0244 123-6308 123-6309 123-6310
'T' 'T' 'T' 'T'	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Brown Brown Brown Brown	White White White	70643601	363-0266 123-6311 123-6312 123-6313

Thermocouples



T/C Type	Conductors	Cores		Reel Length	Allied code	RS order code
J	1/0.2mm	+Black/-White		25 metres	70657194	827-5980
j	1/0.2mm	+Black/-White		50 metres	70657195	827-5984
•	2,0.2	Diddiy Wille	•	30 11161163	, 003, 133	027 030 1
J	1/0.315mm	+Black/-White		25 metres	70657198	827-5993
j	1/0.315mm	+Black/-White		50 metres	70657199	827-5996
K	1/0.315mm	+Green/-Whit		25 metres	70657200	827-6000
K	1/0.315mm	+Green/-Whit		50 metres	70657205	827-6019
T	1/0.315mm	+Brown/-Whit		25 metres	70657208	827-6028
T T	1/0.315mm	+Brown/-Whit		50 metres	70657206	827-6022
1	1/0.51511111	+Brown/-will	le	50 metres	70037200	027-0022
J	1/0.508mm	+Black/-White		25 metres	70657197	827-5990
J	1/0.508mm	+Black/-White		50 metres	70657201	827-6003
K	1/0.508mm	+Green/-Whit	e	25 metres	70657203	827-6012
K	1/0.508mm	+Green/-Whit		50 metres	70657204	827-6016
	_,					
J	7/0.2mm	+Black/-White		25 metres	70657202	827-6006
K	7/0.2mm	+Green/-Whit		25 metres	70657207	827-6025
T	7/0.2mm	+Brown/-Whit		25 metres	70657209	827-6031
N	7/0.2mm	+Pink/-White	···	25 metres	70657210	827-6031
	Conductors	Cores	Jacket	Reel Length	Allied Code	RS order code
Ext	ension:				Code	
KX	7/0.2mm	+Green/-White	Green	10 metres	70657084	827-5615
KX	7/0.2mm	+Green/-White	Green	25 metres	70641729	236-3820
KX KX	7/0.2mm 7/0.2mm	+Green/-White	Green	50 metres	70657085	827-5619 611-7889
KX	7/0.2mm	+Green/-White +Green/-White	Green Green	100 metres 200 metres	70646156 70657088	827-5628
KA.	770.211111	*Greeny*Winte	Green	200 metres	70037000	027-3020
JX	7/0.2mm	+Black/-White	Black	10 metres	70641640	219-4753
JX	7/0.2mm	+Black/-White	Black	25 metres	70657078	827-5592
JX	7/0.2mm	+Black/-White	Black	50 metres	70657079	827-5596
JX Xf	7/0.2mm 7/0.2mm	+Black/-White +Black/-White	Black Black	100 metres 200 metres	70641737 70657081	236-3915 827-5606
17	7/0.211111	+blacky-writte	DIACK	200 metres	70037081	627-3000
TX	7/0.2mm	+Brown/-White	Brown	10 metres	70641637	219-4703
TX	7/0.2mm	+Brown/-White	Brown	25 metres	70641734	236-3870
TX	7/0.2mm	+Brown/-White	Brown	50 metres	70657095	827-5653
TX	7/0.2mm	+Brown/-White	Brown	100 metres	70651749	762-1146
TX	7/0.2mm	+Brown/-White	Brown	200 metres	70657098	827-5662
NX	7/0.2mm	+Pink/-White	Pink	10 metres	70641635	219-4668
NX	•	+Pink/-White	Pink	25 metres	70657091	827-5637
NX		+Pink/-White	Pink	50 metres	70657089	827-5631
NX	7/0.2mm	+Pink/-White	Pink	100 metres	70657092	827-5640

Thermocouples



			Conductors	Cores		Jacket	Reel Length	Allied Code	RS order code
	Compen	sating:							
	VX (KCB))	7/0.2mm	+Green/-Whit	e	Green	10 metres	70657082	827-5609
	VX (KCB))	7/0.2mm	+Green/-Whit		Green	25 metres	70641629	219-4551
	VX (KCB)		7/0.2mm	+Green/-Whit		Green	50 metres	70657080	827-5603
	VX (KCB)		7/0.2mm	+Green/-Whit		Green	100 metres	70641630	219-4573
	VX (KCB))	7/0.2mm	+Green/-Whit	e	Green	200 metres	70657083	827-5612
	VX (KCB))	13/0.2mm	+Green/-Whit	e	Green	10 metres	70657086	827-5621
	VX (KCB))	13/0.2mm	+Green/-Whit	e	Green	25 metres	70657087	827-5625
	VX (KCB))	13/0.2mm	+Green/-Whit	e	Green	50 metres	70657090	827-5634
	VX (KCB))	13/0.2mm	+Green/-Whit	e	Green	100 metres	70651750	762-1152
	U (RCA)		7/0.2mm	+Orange/-Wh	ite	Orange	10 metres	70657096	827-5656
	U (RCA)		7/0.2mm	+Orange/-Wh	ite	Orange	25 metres	70646158	611-7902
	U (RCA)		7/0.2mm	+Orange/-Wh	ite	Orange	50 metres	70657097	827-5659
	U (RCA)		13/0.2mm	+Orange/-Wh	ite	Orange	10 metres	70641641	219-4769
	U (RCA)		13/0.2mm	+Orange/-Wh		Orange	25 metres	70657093	827-5643
	U (RCA)		13/0.2mm	+Orange/-Wh		Orange	50 metres	70657094	827-5647
T/C Typ	e		uctors	Cores		Reel Length	n	Allied code	RS order code
KX		1/0.2	mm	+Yellow/-Red		25 metres		70656106	814-0030
KX		1/0.2	mm	+Yellow/-Red		50 metres		70656111	814-0049
KX		1/0.2	mm	+Yellow/-Red		100 metres		70656109	814-0042
KX		7/0.2		+Yellow/-Red		25 metres		70656110	814-0046
KX		7/0.2	mm	+Yellow/-Red		50 metres		70656113	814-0055
KX		7/0.2	mm	+Yellow/-Red		100 metres		70656114	814-0058
LOV.		1/0.3		.Valla/ Dad		25		70050404	014 0024
KX		1/0.3		+Yellow/-Red		25 metres		70656104	814-0024
KX		1/0.3		+Yellow/-Red		50 metres		70656107	814-0033
KX		1/0.3	mm	+Yellow/-Red		100 metres		70656108	814-0036
TX		1/0.3	mm	+Blue/-Red		25 metres		70656121	814-0080
TX		1/0.3	mm	+Blue/-Red		50 metres		70656126	814-0099
TX		1/0.3	mm	+Blue/-Red		100 metres		70656124	814-0092
TX		1/0.2		+Blue/-Red		25 metres		70656125	814-0096
TX		1/0.2	mm	+Blue/-Red		50 metres		70656128	814-0106
TX		1/0.2	mm	+Blue/-Red		100 metres		70656129	814-0109

Thermocouples



T/C Type	Conductors	Cores	Jacket	Reel Length	Allied code	RS order code		
Extension:								
KX	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656102	814-0018		
KX	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656105	814-0027		
KX	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656103	814-0020		
JX	7/0.2mm	+ White/-Red	Black	25 m	70656096	813-9995		
JX	7/0.2mm	+ White/-Red	Black	100 m	70656098	814-0005		
JX	7/0.2mm	+ White/-Red	Black	200 m	70656099	814-0008		
TX	7/0.2mm	+Blue/-Red	Blue	25 m	70656119	814-0074		
TX	7/0.2mm	+Blue/-Red	Blue	100 m	70656122	814-0083		
TX	7/0.2mm	+Blue/-Red	Blue	200 m	70656123	814-0086		
Compensating:								
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656127	814-0103		
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656130	814-0112		
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656131	814-0115		