

För icke direkt toleranssatta mått gäller toleransklass
General tolerances if not otherwise stated

--



NOM DIM MM		TOL CLASS		
From	To	A	B	C
(1)	6	±0.05	±0.1	±0.2
(6)	30	±0.1	±0.2	±0.5
(30)	100	±0.15	±0.3	±0.8
(100)	300	±0.2	±0.5	±1.2
(300)	1000	±0.3	±0.8	±2

Hål / Holes H13

Skarpa kanter brutna där ej annat anges.
No sharp edges unless otherwise specified.

Övriga generella toleranser enligt ritning 4100-4644.
Additional general tolerances in accordance with drawing 4100-4644.

Denna ritning är Pressmaster AB:s egendom. Skyddad av gällande lag.
This drawing is the property of Pressmaster AB. Protected in accordance with prevailing law.

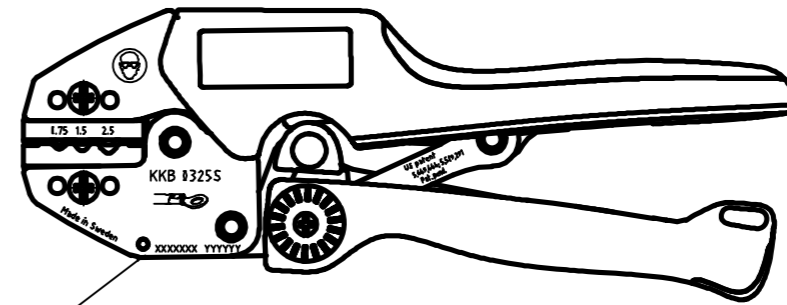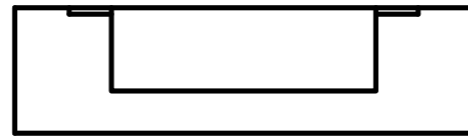

FÖRSPÄNNING / PRELOAD: 150 ± 30 N

Tolkmått / Gauge dimensions (mm)		
URTAG	Gåtolk	Stopptolk
NEST	GO	NO GO
0.75	Ø1.10	Ø1.20
1.5	Ø1.75	Ø1.85
2.5	Ø2.35	Ø2.45

Rev	Change order	Change: A = Added W = Was D = Deleted	Date	Sign
8	P2751	Ändrad enligt kund/ Changed according the customer	091103	SE

Material		Behandling/Treatment				Status	
Konstr/Design CF		Ritad/Drawn TGW	Datum/Date 2009-11-03	Skala/Scale 1:2	Kontr/Checked IP	Godk/Approved NE	Änne/Blank Frisläppt
pressmaster 				Benämning/Denomination KRIMPTÅNG 252-7658 CRIMPING TOOL RS		Vikt/Weight,gram 43002241	Art grp 012
Ritn nr/Drawing no 43002241						REV 008	