




Benefits

- Adjustable color temperature, 3000K/4000K
- Step dimming with greater adaptability
- Compact and powerful
- Delivery of wide and uniform light distribution
- IP54 rated for damp location such as bathroom and kitchen

Application



Model	Item Description	W	PF	lm	lm/W	CRI	Beam	Life	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
FDL71400v2-DS/SC-R150	PROV1 DL MILENA 19.5/25W R150 3000K/4000K SDIM ACT IP54	19.5/25.0	0.9	2000/2500	100	80	100°	50000	177*105*180	553* 232 *395	12
FDL71600v1-DS/SC-R200	PROV1 DL MILENA 19.5/25W R200 3000K/4000K SDIM ACT IP54	19.5/25.0	0.9	2420/3100	124	80	100°	50000	230*111*233	705*236*488	12


Application Conditions	
IP	IP20/IP54
Operating Temperature	-30~40°C
Application Temperature	25°C
Storage Environment	-25~50°C

Mechanical Properties	
Optical Material	Polycarbonate
Housing Material	Aluminium+Polycarbonate
Finishing Colour	White


Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

Photometric Data


FDL71400v2-DS/SC-R150




FDL71600v1-DS/SC-R200



Dimensional Drawing

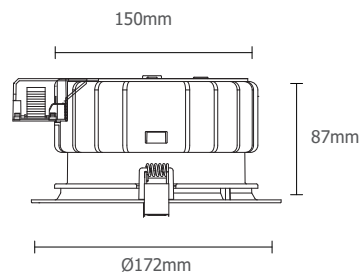

FDL71400v2-DS/SC-R150

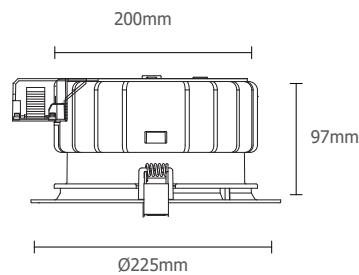

FDL71600v1-DS/SC-R200