


FEATURES

- Types available
 - 10 Watt
 - 18 Watt
 - 22 Watt
- IP 66
- Colour Temperature: 4.000 K
- Color Rendering Index (CRI) >80
- LED Lifetime: 45.000 h (L80)
- Wide beam angle: 200°
- Impact Protection: IK 10
- Operating Temperature: -20°C - +50°C
- Supply Voltage: 100-240V / 50-60 Hz
- Incl. mounting clamps

RS PRO LED tubular luminaire

Stock No: 2215294, 2215292, 2215293

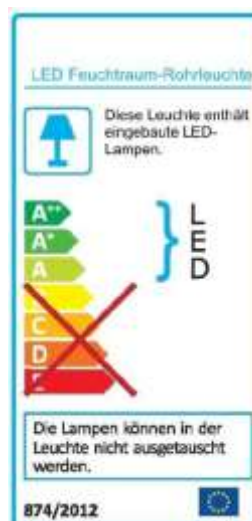

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has

been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

Product Details

- Very compact luminaire for humid areas in T8 format
- Luminaire housing made of impact-proof (IK 10), opal polycarbonate (PC) creates a very homogeneous appearance
- Sealed end caps, white
- Wide beam angle of 200°
- Wired ready for connection, incl. 1 m connection cable
- IP 66, LED-lifetime 45.000 h (L 80), CRI > 80, 4000 K, SDCM < 6 (initial)
- Suitable as surface mounted or suspended luminaire
- Surface-mounted assembly by means of included mounting clamps
- Mounting distance variable selectable

Mechanical Specifications

Impact Protection	IK10
-------------------	------

Electrical Specifications

Supply Voltage	100 – 240 V / 50 – 60 Hz
----------------	--------------------------

Protection Category

IP Rating	IP66
-----------	------

Additional Information

EAN	
Custom Tariff Number	85395000

Classification

LED Lighting

eCI@ss (Version)	
UNSPSC (Version)	

Approvals

Standards Met	CE compliant
RoHS compliant	Yes

Similar Products

Stock No.	Watt	Luminous Flux (lm)	L (mm)	A (mm)	Ø (mm)	D (mm)
2215294	10	1400	588	475	26	30
2215292	18	2520	1173	1075	26	30
2215293	22	3080	1473	1375	26	30

