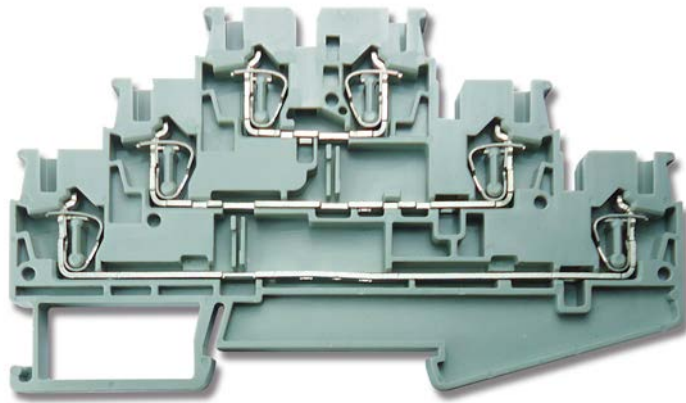


Datasheet





Stock No: 913-1260

Triple Level Spring Terminal Blocks, 2.5sq.mm

Spring Clamp Terminal Blocks, 20A, 600V, 28-12 AWG, 0.08-4 sq.mm



Specifications:

Specifications	2.5mm ²
Technical Data	Rated voltage / Rated current / Wire size
UL	600V / 20A / AWG 28-12
CSA	600V / 20A / AWG 28-12
IEC	500V / 20A / 0.08-4mm ²
Insulating impulse voltage withstand/pollution degree	6KV / 3
Insulation stripping length (mm)	10~12 mm
Net weight per piece	17.3 g
Material / Available Color	<p style="text-align: center;">●</p> <p style="text-align: center;">Grey 913-1260</p>
Rail Dimensions	T / W / H (mm)
For TS35x7.5 	5.2 x 99.6 x 58
For TS35x15 	5.2 x 99.6 x 65.5
Accessories	Cat. No.
End Bracket 	878-7553
	878-7556

Dimensions in mm:

