

Material Handling



Kanazawa Vertical Lifting Clamp

KVC Series

Features:


- Pivoting shackle ensures adequate gripping pressure to hold plate safely
- Hardened steel jaws for positive grip and locking mechanism
- Suitable for structural steel up to HRC30/Brinell300
- 150% overload factory tested
- Manufactured according to EC Council Directive 98/37/EC Machinery, American Standard ANSI/ASME B30.20



Stock Code		AQ01091	AQ01092	AQ01093	AQ01094	AQ01095
Rated Capacity	t	0.5	1.0	2.0	3.0	5.0
Proof Test Load	KN	7.35	14.7	29.4	44.1	73.5
Jaw Opening	mm	0-15	0-20	0-25	0-30	0-50
Net Weight	kg	1.9	4.8	6.5	14.8	22.5

Kanazawa Horizontal Lifting Clamp

Stock Code	Model	Rated Capacity (t)	Test Load (t)	Jaw Opening (mm)	N.W (Kg)
AQ01930	0.75T	0.75	1.5	0-25	2.4
AQ01097	1T	1	2	0-30	3.4
AQ01031	2T	2	4	0-35	5.4
AQ01098	3T	3	6	0-40	6
AQ01096	4T	4	8	0-45	6.3
AQ01099	5T	5	10	0-55	7.5

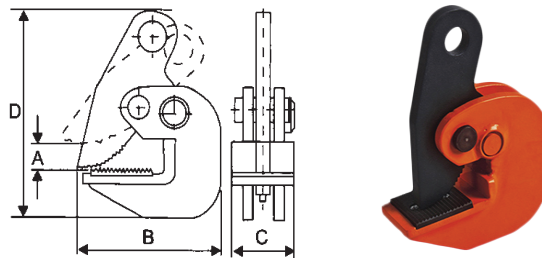

Kanazawa KBC/KBE I Beam Clamp


Features:

1. Robust all steel construction with safety operation.
2. Compact size with light weight.
3. Easy to install with minimum headroom.
4. Super-quick in adjustment to any girder width in range.

Stock Code Model		AQ01101 KBC 1	AQ01102 KBC 2	AQ01103 KBC 3	AQ01104 KBC 5	AQ01105 KBC 10
Size	Ton	1	2	3	5	10
Rated Load	kg	1000	2000	3000	5000	10000
Test Load	kN	14.71	29.42	44.13	61.92	125
Flange Width	mm	75-230	75-230	80-320	90-310	90-320
Dimensions (mm)	Max. A	260	260	354	354	400
	Min. B	180	180	235	235	250
	Max. B	360	360	490	490	520
	C	64	74	103	110	120
	D	5	6	8	10	12
	E	215	215	260	260	280
	Max. F	155	155	225	225	230
	Min. F	102	102	140	140	160
	Min. G	25	25	45	45	70
	H	22	22	24	28	44
Net Weight	kg	4.5	5	10.5	11	16
Gross Weight	kg	5.5	8	11.5	12	17
Packing Size	kg	43x10x17	43x10x17	39x14x34	39x14x34	55x17x28

KBC Series

KBE Series

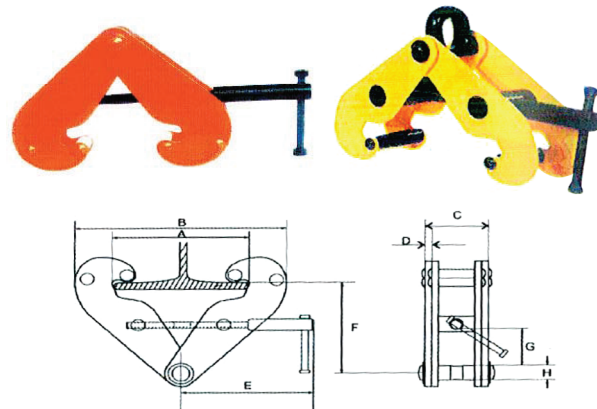

Kanazawa Plain & Gear Trolley

Stock Code	Cap kg	Size	Beam Flange width b mm	Beam Flange Thickness t	A mm	G mm	D1 mm	D2 mm	H mm	H1 mm	L mm	L1 mm	R mm	D mm	Weight (kg)
AQ01079	500	A	50-203	25	77	16	25	30	71.5	30.5	260	130	60	146	8.0
AQ01080	1000	A	50-203	25	82.5	17	30	35	71.5	30.5	260	130	60	150	9.0
AQ01081	2000	A	66-203	25	98.5	22	40	47	95.9	30.5	310	150	80	155	16
AQ01082	3000	A	74-200	25	114	26	48	58	131	30	390	180	112	160	32
AQ01083	5000	A	90-203	25	132.5	33	60	70	142.5	30	450	209	125	167	48
AQ01084	10,000														
Stock Code	Cap kg	Size	Beam Flange width b mm	Beam Flange Thickness t	A mm	G mm	D1 mm	D2 mm	H mm	H1 mm	L mm	L1 mm	R mm	D mm	Weight (kg)
AQ01085	500	A	50-203	25	77	16	25	30	91.5	30.5	260	130	60	146	9.7
AQ01086	1000	A	50-203	25	82.5	17	30	35	91.5	30.5	260	130	60	150	11.2
AQ01087	2000	A	66-203	25	98.5	22	40	47	90.5	30.5	310	150	80	155	18
AQ01088	3000	A	74-200	25	114	26	48	58	107.7	30	390	180	112	160	35.4
AQ01089	5000	A	90-203	25	132.5	33	60	70	149.5	30	450	209	125	167	51.8
AQ01090	10,000														

