



ENGLISH

Datasheet

Aluminium Electrolytic Capacitor

RS Stock number 711-1425




Specifications:

Item	Performance Characteristics																																											
Operating Temperature Range	-40 to +105°C	-25 to +105°C																																										
Rated Voltage Range	6.3 to 100 VDC	160 to 450 VDC																																										
Capacitance Tolerance	± 20% (120Hz, +20°C)																																											
Leakage Current (at 20°C, max.)	I < 0.01 CV or 3 (µA). After 1 minute whichever is greater measured with rated working voltage applied.	I < 0.03 CV or 3 (µA). After 1 minute with rated working voltage applied.																																										
Dissipation Factor (120Hz, 20°C)	<table border="1"> <thead> <tr> <th>Working voltage (VDC)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>D.F (%) Max.</td> <td>23</td> <td>20</td> <td>16</td> <td>14</td> <td>12</td> <td>10</td> <td>10</td> <td>10</td> <td>15</td> <td>15</td> <td>16</td> <td>20</td> <td>20</td> <td>20</td> </tr> </tbody> </table>														Working voltage (VDC)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	D.F (%) Max.	23	20	16	14	12	10	10	10	15	15	16	20	20	20
	Working voltage (VDC)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																													
D.F (%) Max.	23	20	16	14	12	10	10	10	15	15	16	20	20	20																														
For capacitance > 1000µ F, add 2% per another 1000µ (+20°C at 120Hz)																																												

Specifications:

Item	Performance Characteristics																																													
Low Temperature Characteristics (at 120Hz)	Impedance ratio max.																																													
	<table border="1"> <thead> <tr> <th>W.V (VDC)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Z- 25°C/+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>3</td> <td>5</td> <td>6</td> <td>15</td> </tr> <tr> <td>Z- 40°C/+20°C</td> <td>9</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	W.V (VDC)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	Z- 25°C/+20°C	4	3	2	2	2	2	2	2	3	3	3	5	6	15	Z- 40°C/+20°C	9	6	4	4	3	3	3	3	-	-	-	-	-	-
	W.V (VDC)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																															
Z- 25°C/+20°C	4	3	2	2	2	2	2	2	3	3	3	5	6	15																																
Z- 40°C/+20°C	9	6	4	4	3	3	3	3	-	-	-	-	-	-																																
<p>For capacitance value 1000µF, add 0.5 per another 1000µF for -25°C/+20°C For capacitance value 1000µF, add 1 per another 1000µF for -40°C/+20°C</p>																																														
Load Life	<p>Test Conditions: Duration time: 2000hrs Ambient temperature: +105°C Applied voltage: Rated DC working voltage After test requirements: +20°C After test requirements: ≤ ± 20% of initial measured value Dissipation Factor: ≤ 200% of the initial specified value Leakage Current: ≤ the initial specified value</p>																																													
Shelf Life	<p>Test Conditions: Duration time: 1000hrs Ambient temperature: +105°C Applied Voltage: None After test requirements at +20°C: Same limits as load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.</p>																																													

Diagram of Dimensions:

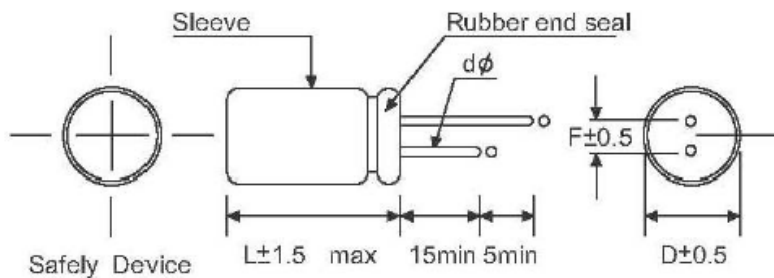

	(Unit: mm)									
D	5	6	8	10	13	16	18	22	25	
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10	12	
ϕd	0.5			0.6			0.8			1.0



Features:

- Used in communication equipment's, switching power supply, etc.
- Safety vent construction design

Ripple Current & Temperature

Temperature (°C)	45	60	70	85	105
Multiplier	2.10	1.90	1.65	1.40	1.00

Ripple Current & Frequency Multipliers

CAP (µF)/Hz	50 (60)	120	400	1K	10K	50 – 100K
CAP ≤ 10	0.8	1.0	1.30	1.45	1.65	1.70
10 < CAP ≤ 100	0.8	1.0	1.23	1.36	1.48	1.53
100 < CAP ≤ 1000	0.8	1.0	1.16	1.25	1.35	1.38
1000 < CAP	0.8	1.0	1.11	1.18	1.25	1.28

Case Size

Ø D x L (mm)

WV (SV) uF	6.3		{8}		10		{13}		16		{20}		25		{32}		35		{44}	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
4.7													5x11	27	5x11	29				
6.8													5x11	35	5x11	38				
10									5x11	38	5x11	40	5x11	42						
22					5x11	50	5x11	56	5x11	56	5x11	60	5x11	62						
33	5x11	56	5x11	60	5x11	60	5x11	65	5x11	65	5x11	70	5x11	78						
47	5x11	68	5x11	72	5x11	72	5x11	100	5x11	100	5x11	105	5x11	110	5x11	115				
68	5x11	77	5x11	82	5x11	82	5x11	105	5x11	105	6.3x11	120	6.3x11	140						
100	5x11	98	5x11	110	5x11	110	5x11	115	5x11	115	6.3x11	135	6.3x11	150	6.3x11	165	8x11	180		
220	5x11	160	6.3x11	180	6.3x11	180	6.3x11	220	6.3x11	220	8x11	230	8x11	240	8x11	300	10x12	330		
330	6.3x11	200	6.3x11	260	6.3x11	260	8x11	300	8x11	300	8x11	350	8x11	410	10x12	420	10x15			
470	6.3x11	280	6.3x11	300	6.3x11	300	8x11	380	8x11	380	8x14	415	8x11	480	10x12	480	10x17	520		
560	8x11	320	8x11	330	8x11	330	10x12	410	10x12	410	10x15	460	10x15	540	10x15	540	10x17			
680	8x11	360	10x12	420	10x12	420	10x12	480	10x12	480	10x15	520	10x15	650	10x15	650	10x20			
820	8x11	390	10x12	480	10x12	480	10x15	550	10x15	550	10x15	640	10x15	760	10x15	760	10x20			
1000	8x11	420	10x12	530	10x12	530	8x16	570	10x15	570	10x15	600	10x15	680	10x15	680	10x25	870		
1200	10x15	480	10x15	580	10x15	580	10x17	630	10x15	630	10x15	740	10x15	850	10x15	850	13x21	880		
1500	10x15	620	10x17	770	10x17	770	10x20	820	10x20	820	13x21	910	13x21	970	13x21	970	13x26			
2200	10x17	780	10x17	870	10x17	870	13x21	1020	13x21	1020	13x21	1080	13x21	1300	13x21	1300	16x26	1300		
2700	10x20	850	13x21	920	13x21	920	13x26	1060	13x26	1060	16x26	1100	16x26	1400	16x26	1400	16x31	1400		
3300	10x20	970	10x25	1110	13x21	1110	13x21	1220	13x21	1220	16x26	1240	16x26	1580	16x26	1580	16x31	1580		
4700	10x25	1160	13x21	1360	13x21	1360	16x26	1620	16x26	1620	16x31	1620	16x31	1800	16x31	1800	18x36	1800		
5600	13x26	1320	16x26	1510	16x26	1510	16x31	1720	16x31	1720	16x36	1720	16x36	2000	16x36	2000	18x36	2000		
6800	16x26	1470	16x26	1680	16x26	1680	16x31	1880	16x31	1880	18x36	1880	18x36	2060	18x36	2060	18x41	2060		
8200	16x26	1520	16x31	1840	16x31	1840	16x36	1950	16x36	1950	18x36	1950	18x36	2180	18x36	2180	22x42	2180		
10000	16x26	1690	16x36	1900	16x36	1900	18x36	2060	18x36	2060	22x42	2060	22x42	2300	22x42	2300	25x44	2300		
15000	16x36	2080	18x36	2230	18x36	2230	22x40	2300	22x40	2300	22x42	2300	22x42	-	22x42	-	-	-		

Ripple Current(mA,rms)at105□120Hz

Case Size uF	50 {63}		63 {79}		100 {125}		160 {200}		200 {250}	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	5x11	1.3	5x11	1.3	5x11	1.3	-	-	-	-
0.22	5x11	2.9	5x11	2.9	5x11	2.9	-	-	-	-
0.33	5x11	4.2	5x11	4.2	5x11	4.2	-	-	-	-
0.47	5x11	8	5x11	8	5x11	8	5x11	12	5x11	12
1	5x11	14	5x11	14	5x11	15	5x11	17	6.3x11	17
2.2	5x11	20	5x11	21	5x11	22	6.3x11	28	6.3x11	33
3.3	5x11	26	5x11	28	5x11	30	6.3x11	32	6.3x11	43
4.7	5x11	32	5x11	34	5x11	36	6.3x11 8x11	36 42	8x11	51
6.8	5x11	40	5x11	42	6.3x11	47	8x11	56	10x12	63
10	5x11	50	5x11	51	6.3x11	60	8x11 10x12	75 78	10x12 10x15	83 90
22	5x11	75	5x11 6.3x11	75 85	6.3x11 8x11	98 105	10x15	105	10x20	135
33	5x11 6.3x11	90 95	6.3x11 8x11	105 115	8x11 10x12	145 155	10x20	170	13x21	180
47	6.3x11	120	6.3x11 8x11	145 155	10x12 10x15	170 180	13x21	210	13x21 13x26	220 230
68	8x11	155	8x11	185	10x15	240	13x26	280	16x26	300
100	8x11	200	10x12	240	10x20	290	13x26 16x26	320 330	16x26	360
220	10x12 10x15	350 380	10x17 10x20	400 430	13x26 16x26	530 560	16x36	580	18x36	590
330	10x17 10x20	450 470	13x21	570	16x26	680	18x31	710	18x36	740
470	13x21	610	13x21 13x26 16x26	640 700 720	16x26 16x31	840 860	18x41	880	22x42	890
560	13x21	680	13x26	770	16x36	880	-	-	-	-
680	13x26	770	16x26	880	16x36	920	-	-	-	-
820	13x26	850	16x26	920	18x31	970	-	-	-	-
1000	13x26 16x26	900 1010	16x32 16x36	1190 1220	18x41	1250	-	-	-	-
1500	16x31	1300	18x31	1350	22x42	1500	-	-	-	-
2200	18x36	1550	18x36	1590	25x44	1880	-	-	-	-
2700	18x36	1610	22x42	1720	-	-	-	-	-	-
3300	18x36	1780	22x42	1900	-	-	-	-	-	-
4700	22x42	2050	25x44	2200	-	-	-	-	-	-
5600	25x42	2160	-	-	-	-	-	-	-	-
6800	25x44	2280	-	-	-	-	-	-	-	-

Ripple Current(mA,rms)at105□120Hz

Case Size WV {SV} uF	Ø D x L (mm)															
	250		{300}		350		{400}		400		{450}		450		{500}	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	5x11	12	6.3x11	15	6.3x11	15	6.3x11	15	6.3x11	15	6.3x11	15	6.3x11	15	6.3x11	15
1	6.3x11	17	6.3x11	20	8x11	22	8x11	22	8x11	22	8x11	22	8x11	22	8x11	22
2.2	8x11	38	10x12	39	10x12	39	10x12	39	10x12	39	10x12	39	10x12	39	10x12	39
3.3	8x11	43	10x12	53	10x12	53	10x12	53	10x15	53	10x15	53	10x15	53	10x20	55
4.7	10x12	51	10x12	63	10x15	68	10x15	68	10x15	68	10x15	68	10x20	64	10x20	64
6.8	10x12	70	10x15	79	10x15	85	10x15	85	10x15	85	10x15	85	10x20	75	10x20	75
10	10x15	90	10x20	110	10x15	100	10x20	112	13x21	115	13x21	115	13x21	92	13x26	98
22	10x20	160	13x26	180	13x21	170	16x28	190	13x21	170	16x26	175	16x31	175	16x31	180
33	13x21	175	13x26	180	16x26	190	16x26	220	16x26	220	16x26	220	16x36	210	16x36	210
47	13x26	240	16x31	250	16x31	300	16x31	300	16x31	300	16x31	300	16x36	280	16x36	280
68	16x26	320	16x31	330	16x36	355	16x36	355	16x36	355	16x36	355	18x36	330	18x36	330
100	16x31	400	18x36	420	18x36	450	18x36	450	18x36	450	-	-	-	-	-	-
120					18x31	440										

Ripple Current(mA,rms)at105□120Hz