

Features

- USB Type C
- USB 3.0 Type A
- White
- 5 Pack

RS PRO 3mtr USB 3.1 Type C M – USB 3.0 Type A M – Black – 5 Pack

RS Stock No.: 2668503



RS Professionally Approved Products bring to you, professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 3 metre USB version 3.1 type C male to USB version 2.0 type A male cable has a black PVC jacket and connector hoods. The cable flex has copper wire conductors and drain wire, with an aluminium braid, foil shielding and has an outer diameter of 3mm.

The connectors are nickel and have a strain relief to help avoid the cable splitting around the edge of the boot.

USB 3.1 supports 20-volt, 3-amp power delivery, this cable has a 56KΩ resistor to prevent too much power getting to a USB 2.0 device.



General Specifications

USB Type	USB 3.1
Connector A	Male USB
Connector A Type	USB Type C
Connector A Gender	Male
Connector B	Male USB
Connector B Type	USB A
Connector B Gender	Male
Connector Style	Plug, straight
Data Transfer Rate	480mbps
Outer Sheath Material	PVC
Sheath Colour	Black
Connector Plating	Nickel
Pin Construction	Copper

Approvals

Standards Met	CE UKCA ROHS REACH
Declarations	CE UKCA ROHS REACH

Parameters	186-3056
Brand	RS PRO
Pack Size	1
USB Type	USB 3.1
Connector A	USB 3.1 Type C
Connector A Type	USB 3.1 Type C
Connector A Gender	Male
Connector B	USB 2.0
Connector B Type	USB 2.0 A
Connector B Gender	Male
Connector Style	Plug, straight
Data Transfer Rate	480Mbps
Outer Sheath Material	PVC
Sheath Colour	Black
Connector Plating	Nickel

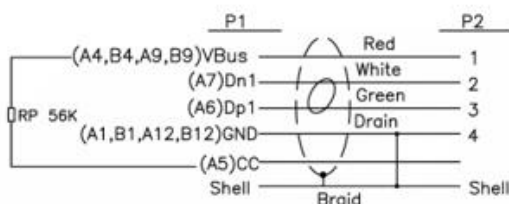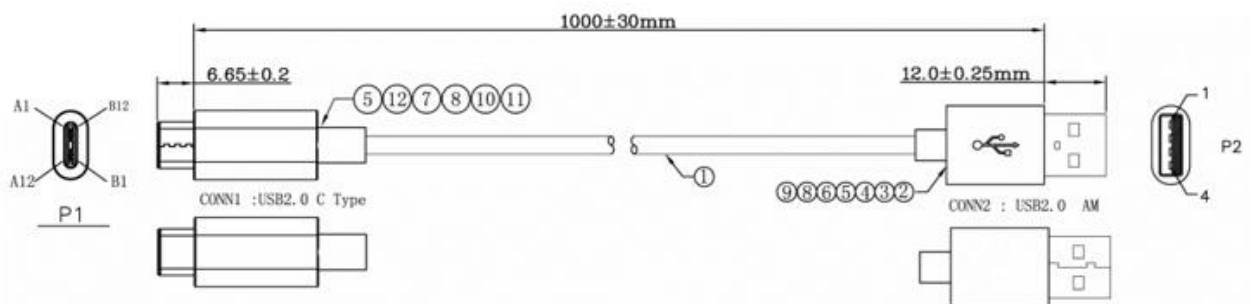

12	Inside Molding:Low pressure material
11	USB TYPE C-Below Tinplate Nickel Plated
10	USB TYPE C-UP Tinplat Nickel Plated
9	W=5MM 25u Double conductive copper foil
8	H.S TUBE # 1.0 Thick wall
7	Outside Molding 45P PVC Color:Black
6	Inside Molding:Transparent PE
5	山崎TYPEC-USB2.0 C Type Connector With PCBA (56KΩ)
4	USB2.0 AM UP Tinplat Nickel Plated
3	USB2.0 AM Below Tinplate Nickel Plated
2	USB2.0 AM insulation:WHITE PIN:Gold plated
1	NO-UL 30AWG*2C+24AWG*3EAB (16/9/0.06TC 95%TC) OD:3.0MM PVC BLACK NO-MARKING