





## ELECTRIC REACH TRUCK FORKLIFT (48V)(CQD) (SIDE STANDING TYPE) 前移式叉车(48v)(CQD)(侧站式)

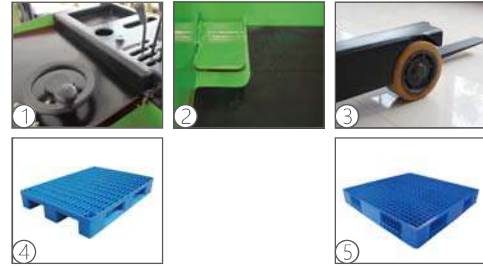

- |             |                                |
|-------------|--------------------------------|
| 1. 方向盘      | 1. Steering wheel              |
| 2. 脚踏断电开关   | 2. Pedal power switch          |
| 3. 前轮采用大轮设计 | 3. Front wheel                 |
| 4. 适用于单面托盘  | 4. Apply to single-deck pallet |
| 5. 适用于双面托盘  | 5. Apply to double-deck pallet |

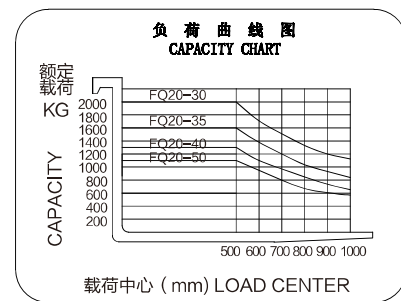

### 产品性能 Performance




- |   |  |
|---|--|
| <ol style="list-style-type: none"> <li>1. CURTIS柯蒂斯电控，控制器多重自动保护系统。</li> <li>2. EPS转向能耗降低~20%，作业精确，降低了驾驶员疲劳度，大幅提升生产力。</li> <li>3. 前移式叉车适用于大吨位、高起升的货物存储应用，适用多种托盘，具有门架整体前移的特点，转弯半径小，可忽略货架底层的障碍，可适合窄通道使用。</li> <li>4. 提升操纵杆处于安全下降位置，货叉在降至离地面10cm时下降速度自动减慢，有效防止货物因震动而受到损伤。货叉上升至最高处时，缓冲系统使得门架震动减小，提升了操作者舒适度。</li> <li>5. 踏板上脚踏断电开关，控制车辆运行，只有在踩下脚踏断电开关后，才可以操作车辆行驶，反之车辆则停止运行，该设计提高了整车的安全性能。</li> <li>6. 48V大功率电池，长久的续航能力和电池使用寿命。</li> </ol> | <ol style="list-style-type: none"> <li>1. Because of CURTIS electronic control, so we have multiple automatic protection system controllers.</li> <li>2. EPS swerve can reduce 20% of the energy consumption. It is precise, flexible, and convenient to operate. At the same time, it can reduce driver fatigue, boost productivity.</li> <li>3. Moved forward type electric stacker is suitable for large tonnage, high hoisting cargo storage applications, applying to a variety of trays, and has the characteristics of moving forward for overall door frame. Furthermore, it has small turning radius and can neglect obstacles from the bottom of the shelf. So it is suitable for narrow channel.</li> <li>4. During the operation of decline, the pallet fork is kept in safe when hoisting control lever is in decline position. Especially when pallet fork drop to 10 cm above the ground, then speed will slow down automatically. It can effectively protect the goods from damage due to vibration. When the pallet fork goes to the top, buffering system can reduce the vibration of the door frame. So it is comfortable for operator.</li> <li>5. Placing your feet on electric breaking switch, then you can take control of the driving. Only after the foot stepped on power switch can operate vehicle, whereas the vehicle stop. So this design improves the vehicle's safety performance.</li> <li>6. It is durable and has long battery life because of 48V high power battery.</li> </ol> |
|---|--|

## 前移式叉车(48v)(CQD)(侧站式)

Electric Reach truck forklift (48V)(CQD) (Side Standing Type)

名称(Name)	前移式叉车(48v)(CQD)(侧站式) Electric Reach truck forklift (48V)(CQD) (Side Standing Type)		
	站驾式(Standing posture)		
型号(Model No.)	单位	CQD15-30	CQD20-30
操作类型(Operation type)		全电动(Full-Electric)	
动力类型(Power type)		全电动(Full-Electric)	
载重(Capacity)	KG	1500	2000
最大起升高度(Max Lifting Height)	H2(mm)	3000	3000
载荷中心 (Load center)	C(mm)	500	500
轮胎配置(Wheel type)		聚氨酯实心胎(Pu solid tire)	
门架倾斜角度(The door frame Angle)		3/5	3/5
货叉尺寸(Fork dimensions)	mm	1070*100*35	1070*122*40
货叉调节范围(Fork spread)	mm	210-705	270-705
门架前移距离(Reach distance)	mm	550	650
全长 (含货叉) (Overall length including fork)	L(mm)	2270	2470
全宽(Overall width)	S(mm)	1090	1260
门架闭合高度(Height--Mast Lowered)	H1(mm)	2100	2100
货叉起升时最大高度 (Maximum height when fork is lifting)	H(mm)	3965	3965
转弯半径 (外侧) (Turning radius)	Wa(mm)	1600	1970
护顶架高度 (The height of overhead guards)	mm	2280	2280
最小堆垛通道(Min. stacking aisle) (1000x1200,1200沿货叉)	mm	2700	2960
最小离地间隙(Min ground clearance)	mm	70	80
最大行驶速度(Max travel speed)	Km/h	6/7	6.8/7.8
上升速度(Lifting speed)	mm/s	110/210	120/240
爬坡能力(Grade ability)	%	≤10	≤10
总重(Total weight)	KG	2400	2955
驱动轮(Driving Wheel)	mm	∅343*114	∅382*142
前轮(front wheel)	mm	∅210*85	∅267*114
平衡轮(Balance wheel)	mm	∅150*50	∅180*76
电池容量(Battery capacity)	V/Ah	48/300	48/400
充电器(Charger-Intelligent)	V/A	48/40	48/50
驱动马达(Driving motor)	Kw	4.5	6.5
起升马达(Lifting motor)	Kw	6.3	6.3
驱动控制类型(Drive Controlling Type)		6.5 ( AC )	6.5 ( AC )
行走调速方式(Walking Adjustable Type)		霍尔式加速器(Holzer type accelerator)	
制动(Walkie brake)		电磁	

此数据仅供参考，具体以实物为准  
Data are for reference only specific in kind prevail

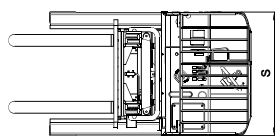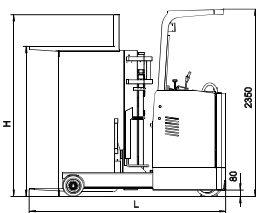

We can supply:

	CQD15-30	CQD15-40	CQD15-50	CQD15-60	CQD15-72	CQD20-30	CQD20-40	CQD20-50	CQD20-60	CQD25-30
Load Capacity (kg)	1500	1500	1500	1500	1500	2000	2000	2000	2000	2500
Lifting Height (mm)	3000	4000	5000	6000	7200	3000	4000	5000	6000	3000