

Datasheet

RS PRO VINYL-INSULATED RING TERMINALS

Stock number: 178-8654

MAXIMUM ELECTRIC CURRENT:


| | | | | |
|--------|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 |
| AMP. | 9 | 12 | 17 | 18 |

MAXIMUM ELECTRICAL RATING: 105° C 600 VOLTS MAX.

INSULATION MATERIAL: VINYL (PVC)

TERMINAL MATERIAL: COPPER

INSULATION COLOR: RED

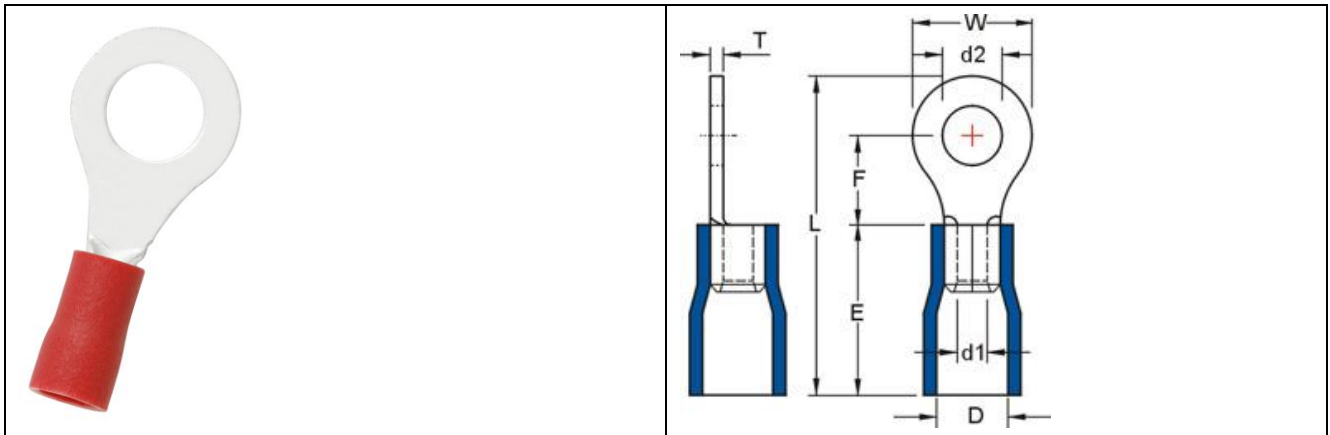

| WIRE RANGE A.W.G. mm ² | ITEM NO. | STUD SIZE | DIMENSION inch(mm) | | | | | | | |
|---|----------|-----------|--------------------|-------|-------|-------|-------|-------|-------|------|
| | | | BUTTED SEAM | d2 | W | F | L | E | D | d1 |
| 22-16 A.W.G. | 178-8654 | 1/4 | 0.252 | 0.457 | 0.433 | 1.055 | 0.394 | 0.157 | 0.067 | 0.03 |
| 0.5-1.5 mm ² | | | 6.4 | 11.6 | 11 | 26.8 | 10 | 4.000 | 1.7 | 0.75 |