



Datasheet

RS PRO IP66 MONOBLOCK INDUSTRIAL ENCLOSURE

Glass Reinforced Polyester (GRP)

H:600 × W:500 × D:230mm

Stock number: 1927119

EN



Feature

- **Manufactured from fibre glass reinforced polyester, moulded by hot compression.**
- **Colour Light Grey RAL 7035**
- **Self-extinguishable: 960°C test withstand. Halogen free. Double insulation. No electrical contact risks.**
- **Degree of protection IP66 UNE 20324 (EN 60529).**
- **Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.**
- **Large door opening (180°). Reversibility for installation right or left door opening.**
- **Anti-intruder hinges system.**
- **Other lock options available**
- **Galvanised steel mounting plate.**
- **Resistant to harsh atmospheres.**
- **Light weight gives an easy installation.**
- **10+ years. Long life lasting without maintenance under standard environmental conditions.**


rspro.com

Description

Standard enclosure colour light grey RAL 7035 supplied with galvanised steel back plate & direct wall mounting fixings.

Dimensions H:600 × W:500 × D:230mm
Weight 11.53kg

Dimensions

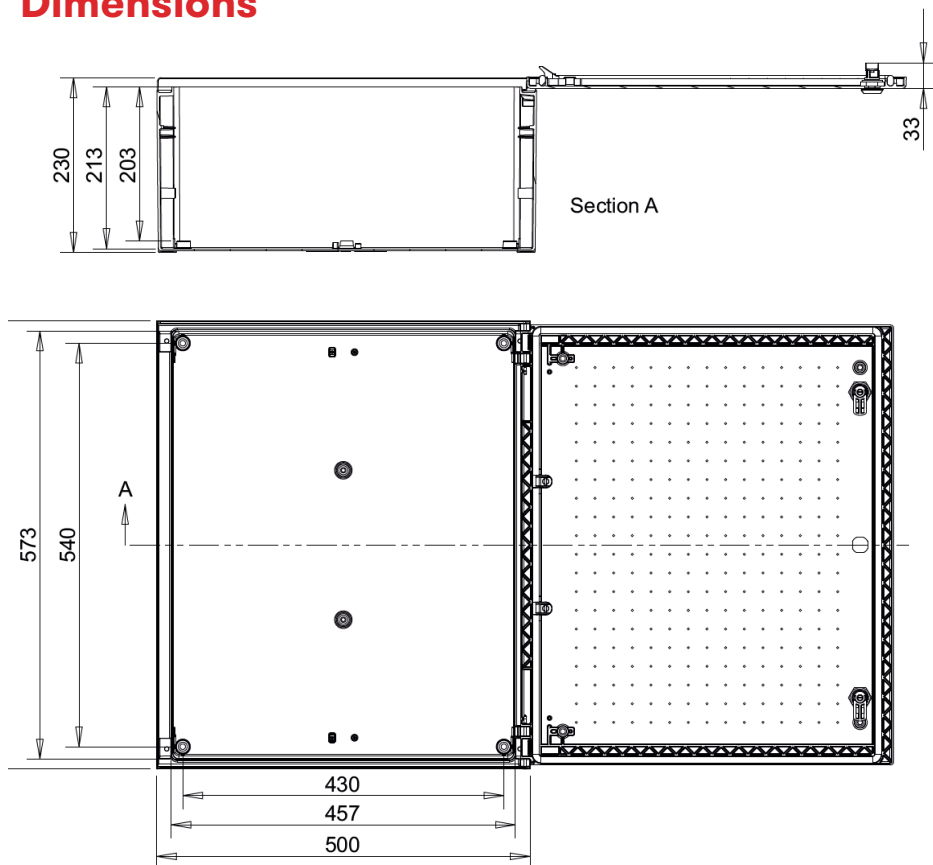

Installation and assembly system

| | | | |
|----------------------|-----|----------------|-----|
| Inside Installation | Yes | Wall Surface | Yes |
| Outdoor Installation | Yes | Floor Mounting | Yes |
| Flush Mounting | No | Pole Mounting | Yes |

Enviromental Performance

| | |
|---|--------|
| Minimum temperature | -30° C |
| Maximum temperature | 70° C |
| Compression resistance | 100kg |
| IP dust water protection degree IEC-60529 | 66 |
| IK impact protection degree IEC-62208 | 10 |

Electrical Performance

| | |
|---|----------|
| Nominal tension direct current up to: | 1500 VdC |
| Nominal tension alternating current up to: | 1000 Vac |
| Maximum power dissipation ΔT=40C (wall surface) | 117.0 W |

