
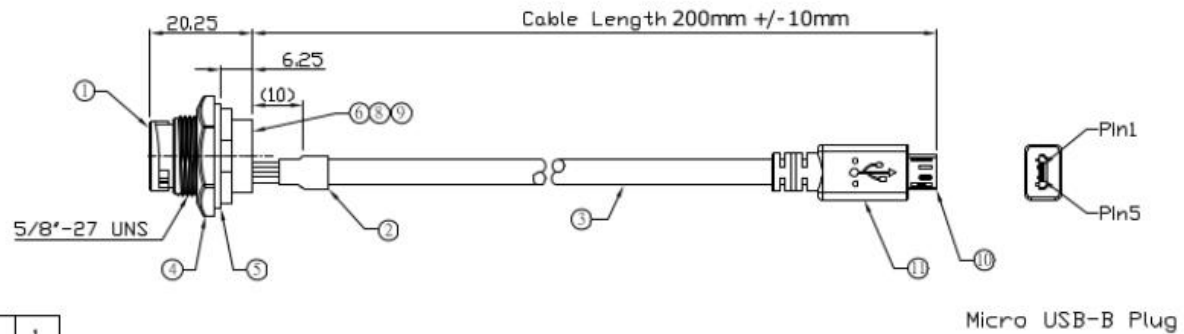



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67,
2. Recommend Panel Thickness : 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N:125-7925
5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 07/30/14	Ray 07/30/14	Ray 07/30/14
02	ECN-140821	Modify Cable Standard	Joyce 08/15/14	Lucas 08/15/14	Ray 08/15/14



11	Over Mold	PVC Color: Black	1
10	Micro USB-B Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
9	Glue	Epoxy Color: Black	
8	Pin Header	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated	1
7	Micro USB-A/B Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
6	PCB	FR-4 Color: -	2
5	Gasket	Silicone Color: Black	1
4	Hex Nut	Thermoplastic Color: Black	1
3	Cable	UL2725 1P*28AWG+3C*24AWG+AL/My+B+B D=5.0mm, Color: Black	1
2	Shrink Tube	Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty



Recommend Panel Cut-Out

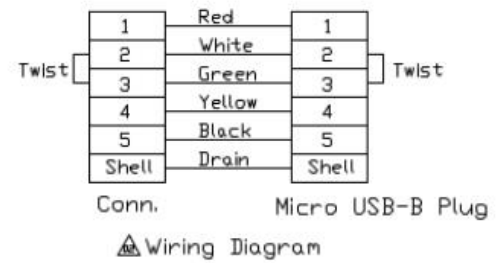

Mating Part:
122-3018

TITLE
Micro USB-AB Plastic C2 Panel Jack Lock With Micro USB-B Plug

RS Stock No
111-6750

	B	1:1	Lucas 07/30/14	Ray 07/30/14	Ray 07/30/14	XX ± 0.5 X.XX ± 0.2	XXX ± 0.05 X.XX ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	ANGLES	UNIT	SHEET