




Datasheet

RS PRO XT60PB Male Connector

Stock number: 180-5372

EN

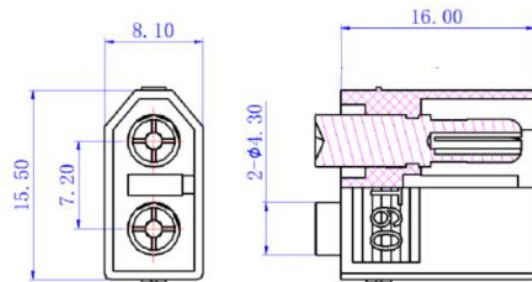

Section

Material & Parameter

Recommend USE: Controller/Charger
Color: Yellow
Metal Material: Brass Gold Plated
Plastic Material: PA
FR Level: UL94 V0
Cable Spec: PCB
Temperature Rise 30A < 60 °C (One hour)
Temperature Rise 60A < 65 °C (One minute)
Weld Metal: 2.1mm/3mm

Contact Resistance: 0.30mΩ
Rated Voltage: DC 500V
Rated Current: 30A
Momentary Current: 60A
Use Times: 1000 TIMES
Use Temperature: -20°C to 120°C
Certification: UL
Insertion Force: 1.8-4KG

Remark: Data sheet will change according with the test background