

FEATURES

- Through beam reflection working principle;
- Excellent anti-interference performance;
- $\leq 1\%$ accuracy
- Emitter and receiver should be used in pair.

RS PRO Photoelectric Sensor

RS Stock No.: 2044007, 2044008, 2044009



RS PRO Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Part Number Description

Part number	Sensing distance	Light source	Output	Connection
2044007 (Emitter)	20m (non adjustable)	Infrared LED (880nm)	NPN NO+NC	2m PVC cable
2044008 (Receiver)				
2044007 (Emitter)	20m (non adjustable)	Infrared LED (880nm)	PNP NO+NC	2m PVC cable
2044009 (Receiver)				

General Specifications

Detection Type	Through beam reflection sensor
Rated distance	20m (non adjustable)
Standard target	> ϕ 15mm opaque object
Repeat accuracy [R]	\leq 5%
Response Time	\leq 8.2ms
Output Indicator	Emitter: Green LED; Receiver: Yellow LED
Ambient temperature	-15°C...55 °C
Ambient humidity	35...85 %RH (non-condensing)

Electrical Specifications

Operating Supply Voltage	10...30 VDC
Current Consumption	\leq 25mA
Residual voltage	\leq 2.5V (receiver)
Load Current	\leq 200mA (receiver)
Hysteresis
Reverse Polarity Protection	YES
Short Circuit Protection	YES
Voltage withstand	1000V/AC 50/60Hz 60s
Insulation resistance	\geq 50M Ω (500VDC)
Vibration resistance	10...50Hz (0.5mm)

Mechanical Specifications

Body Style	Barrel
Mounting Type	Screw Nut
Housing Material	Nickel copper alloy
Dimensions	M30*62mm
Weight	290g

Protection Category

IP Rating	IP67
------------------	------


Additional Information

Custom Tariff Number/HS code	903180
-------------------------------------	--------


Approvals

Compliance/Certifications	CE
----------------------------------	----


Dimension and Wiring

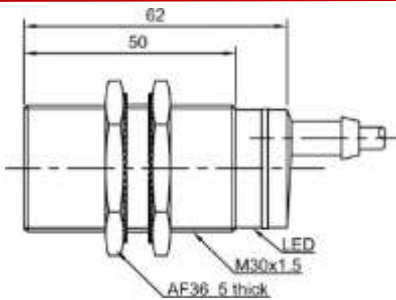


Emitter

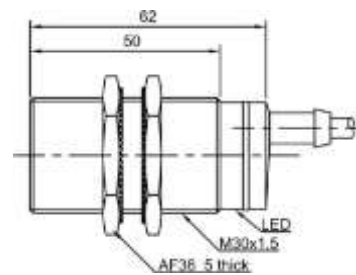


Receiver



Emitter



Receiver NPN NO+NC



Receiver PNP NO+NC