


## Product Name : Sekisui Double Faced Tape #575F

Sekisui Double Faced Tape #575F is developed for permanent use. It performs excellent adhesion power to films, foam, resin plate, etc. It also has excellent resistance. The divergence value of VOC in adhesive is lowered.

### 1. Structure

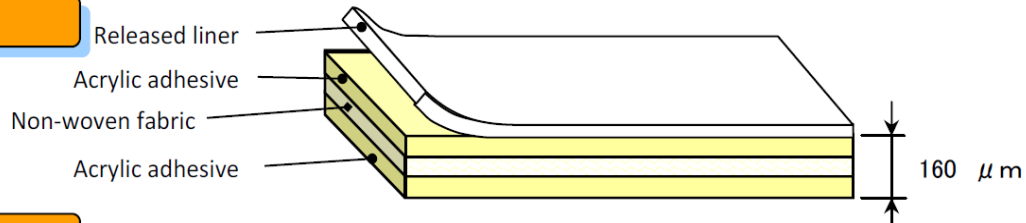

### 2. Use

- 1) To adhere to resin plate and punching process.

### 3. Features

- 1) It has excellent repulsion resistance.
- 2) It performs excellent adhesion power to PP plate.
- 3) It has excellent heat, weather and creep resistance.
- 4) It is suitable for punching process.

### 4. Standard Size

Table-1 Standard Size

Item	Unit	Standard size
Tape's thickness	$\mu$ m	160

\*Please contact us for other scale possibilities.

### 5. General Characteristics

Table-2 General Characteristics

Date Item	Units	Unit	Measurement Value	Testing method
Adhesion power	To sus	N/25mm	22.1	JIS Z 0237
	To PP	N/25mm	17.0	JIS Z 0237
Tack(J.DOW method)	—	1/32"	32	JIS Z 0237
Holding power ( 80°C,500g)	To sus	mm	0.3	JIS Z 0237

※The figures above are measured values and not guaranteed values.

### 6. Caution in use

- 1) Please remove dirt, water, oil and other contaminants from the substrate's surface before use.
- 2) Please avoid re-application, and leave it for several hours after application
- 3) Please avoid direct application on uneven or coarse surfaces and the human body.
- 4) Please avoid storage in places with high temperatures, high humidity, and direct sunlight.
- 5) Please do tests on first-time adherends. If in doubt about its use, please contact us.
- 6) The warranty period of products is 6 months after delivery date.

The specs and appearances may be changed without notice. Customer has responsibility to judge if the tape can be used for the application. In the case of defective tape, liability will be limited to replace the defective tape.