


Datasheet 4LR20 - 4LR25

RS Stock No: 7904681




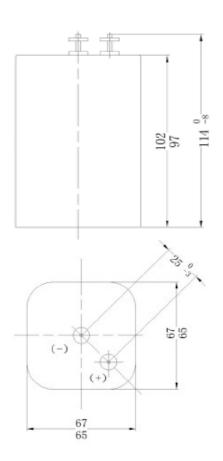


Dimensions (mm)

| CARACTERISTIQUES ELECTRIQUES | |
|--|--|
| ELECTRICAL CHARACTERISTICS | |
| IEC | 4LR25 |
| Couple chimique / Chemical system | Zinc Manganese Alkaline |
| Tension nominale / Nominal Voltage | 6V |
| Capacité nominale / Nominal Capacity | 15000mAh (9.1Ω, 24h/d, 20℃, e.v. : 3.6V) |
| Température de fonctionnement / Operating | |
| temperature | -30℃ ~50℃ |
| Teneur en métaux lourds/Hevay metal contents | Hg < 1ppm - Cd < 5 ppm - Pb < 10ppm |
| | Boitier Métal / Metal casing |
| Details | Vis / Screws |
| Poids / Weight | 945 gr |



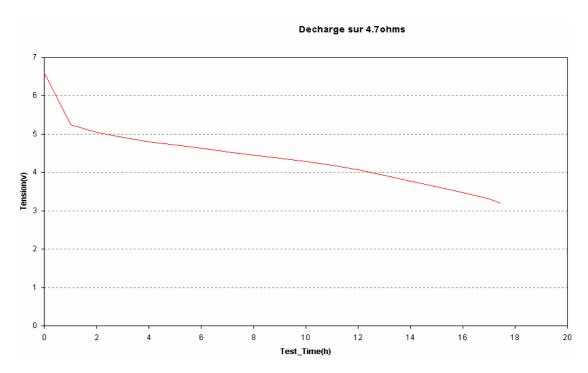

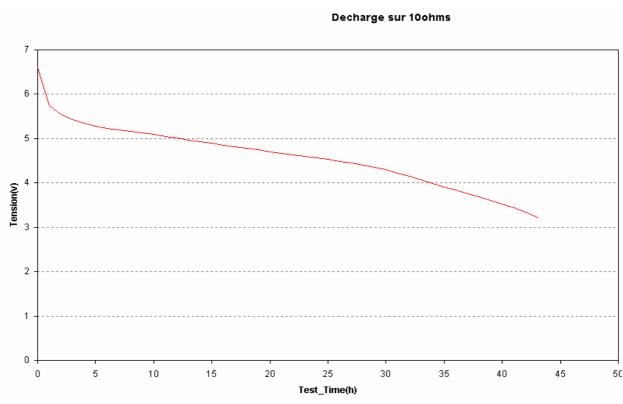

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.