


Datasheet Fibre Optic Cable Assembly

RS Stock number 536-8373



Dimensions:

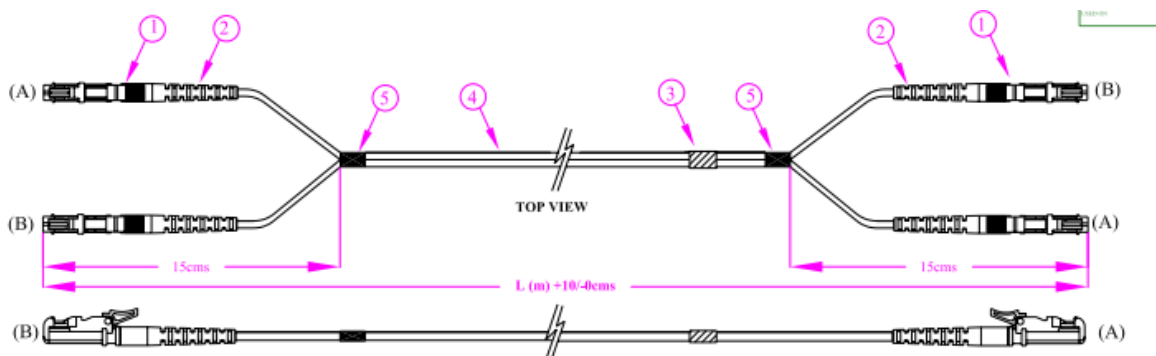

| No. | Description | Ea |
|-----|----------------------|----|
| 1 | E2000 Connector | 4 |
| 2 | E2000 Boots | 4 |
| 3 | Identification Label | 1 |
| 4 | 2.8mm Duplex Cable | 1 |
| 5 | Black Tape | 2 |

Specification

Connector: SC Clips shall be mounted to the connector to make it duplex
 Optical Performance: (IEC 61300-3-4)
 Multimode: (@ 130mm)
 Max.IL-0.30dB Typical: 0.2dB
 Single mode: (@1310mm and or 1550mm)
 E2000/APC: Max. IL – 0.30dB Typical: 0.20dB
 Return Loss: >60dB
 E2000/ APC: Max. IL – 0.30dB Typical 0.20dB
 Return Loss: > 70dB
 RoHS Compliant
 Coiling Diameter: Greater than 200mm