




ENGLISH

Datasheet

Stock No: 290-8552

# RS Pro 25 Way Right Angle Through Hole Mount Stacked PCB D-Sub Connector Socket, 2.77mm Pitch

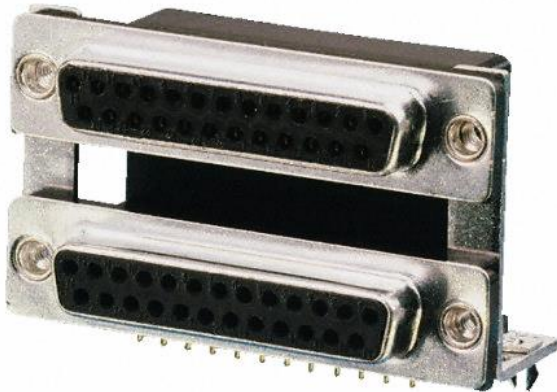

## Product Details

### 90° PCB Double Stack

Double stacked D connectors with tin shells, UL 94 V0 rated insulators, including PCB harpoon board locks and a pair of female screwlocks.

Shell Plating	Tin
Insulator Material	Glass fibre reinforced PBT
Insulator Rating	UL 94 V-0
Contact Material	Phosphor bronze
Contact Plating	Selective gold flash
Current Rating	5A
Voltage Rating	500V Dielectric Withstand
Contact Resistance (max.)	30mΩ
Temperature Range	-55°C to +105°C



ENGLISH

## Specifications:

Number of Contacts	25
Gender	Female
Body Orientation	Right Angle
Mounting Type	Through Hole
Pitch	2.77mm
Mounting Hardware	Threaded Insert, 4-40 UNC
Current Rating	5A
Housing Material	PBT
Voltage Rating	500 V
Contact Plating	Gold
Contact Material	Phosphor Bronze
Maximum Operating Temperature	+105°C
Minimum Operating Temperature	-55°C