


Datasheet

Stock No: 852-261

# RS Pro Perforated Polypropylene (PP) Sheet, 500mm x 500mm x 2mm

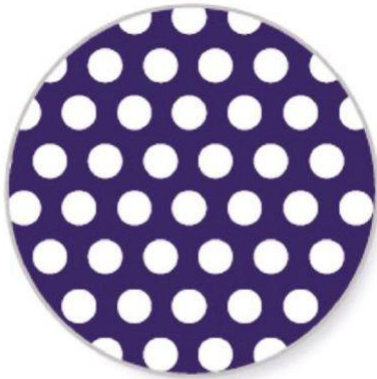

5

## Product Details

### Perforated Polypropylene Sheet

Resistant to most individual chemicals

Temperature range +5°C to +100°C

Selvedged border configuration

Tolerance on length  $\pm 1\%$

### Metal & Plastic

Dimensions (mm)					
Pattern	Hole(mm)	Open Area	Pitch I (mm)	Pitch II (mm)	Hole Configuration
1	1.2 $\emptyset$	42%	1.7	3.2	60°
2	1.5 $\emptyset$	22%	4	4	45°
3	1.7 $\emptyset$	45%	2.4	4.1	60°
4	2.0 $\emptyset$	47%	2.8	4.8	60°
5	3.0 $\emptyset$	33%	5	8.7	60°
6a	3.0 $\emptyset$	51%	4	6.9	60°
6	4.8 $\emptyset$	50%	6.5	11.2	60°
7	6.4 $\emptyset$	43%	9.2	16	60°
8	8.0 $\emptyset$	68%	9.2	16	60°
9	6.0 x 6.0	62%	7.6	7.6	Square
10	6.0 x 6.0	52%	9.1	7.6	Staggered
11	4.7 x 4.7	35%	8	8	Square
12	2.4 x 12.7	34%	4.8	15.1	Rect
13	6.0 A/F	79%	6.76	11.63	Hex
14	10.0 x 10.0	59%	13	13	Square
15	1.0 $\emptyset$	46%	1.4	2.4	60°



ENGLISH

## Specifications:

Length	500mm
Width	500mm
Thickness	2mm
Material	Polypropylene
Open Area Percentage	33%
Pattern Number	5
Hole Layout	60°