


Datasheet

Stock No:1707009

RS Pro

SSMA STRAIGHT JACK RECEPTACLE- SOLDER MOUNT

NO	DESCRIPTION	DATE
△	DEL. PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	03.03.15'
△	49-12/449-012-00-0032210LL → 40490208700002	02.01.18'

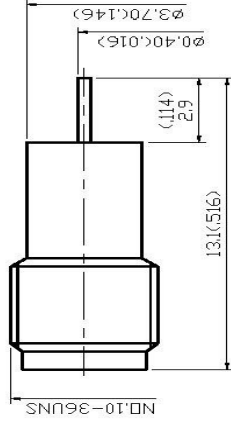

1.0 ELECTRICAL
 1.1 FREQUENCY RANGE: DC-38 GHz
 1.2 NOMINAL IMPEDANCE: 50 OHM
 1.3 VOLTAGE RATING: 250 VOLTS MAX. △
 1.4 VSWR: 1.3 MAX. @18 GHz

2.0 MATERIALS
 2.1 BODIES: STAINLESS STEEL PER JIS SUS 303
 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS
 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL
 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-346A

5.0 ENVIRONMENTAL
 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

3	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 50 μ MIN.
2	INSULATION	TEFLON	1	NONE
1	BODY	STAINLESS STEEL	1	GOLD 3 μ MIN.
NO DESCRIPTION	MATERIAL	QTY	FINISH	

APPROVED _____ by _____ DATE: _____

DESCRIPTION		SSMA STRAIGHT JACK RECEPTACLE- SOLDER MOUNT			
DRAWN	TOLERANCE	品名	40490208700002 △	日	版
Jackie	±0.2	TITLE	NRDHS COMPLIANT (500)	期	REV
CHECK	±0.1	UNIT	mm(in)	04.12.07	A-2
A7c	±0.05	SCALE			
APPROVAL	±5°	ANGLE			
Jenny		例			
		DWG.NO.	49-0002-Z		