

Datasheet

RS PRO HEAT SHRINKABLE-FULLY FEMALE DISCONNECTORS (DOUBLE CRIMP TYPE)

Stock number: **2055273**

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16
AMP.	3	4	7	10

MAXIMUM ELECTRICAL RATING: 300 VOLTS MAX.

SHRINK TEMP. : 150°C


OPERATING TEMP. : -40°C~+105°C

INSULATION MATERIAL: HIGH DENSITY PE

TERMINAL MATERIAL: BRASS

INSULATION MATERIAL: WITH COPPER SLEEVE ON BARREL

INSULATION COLOR: RED

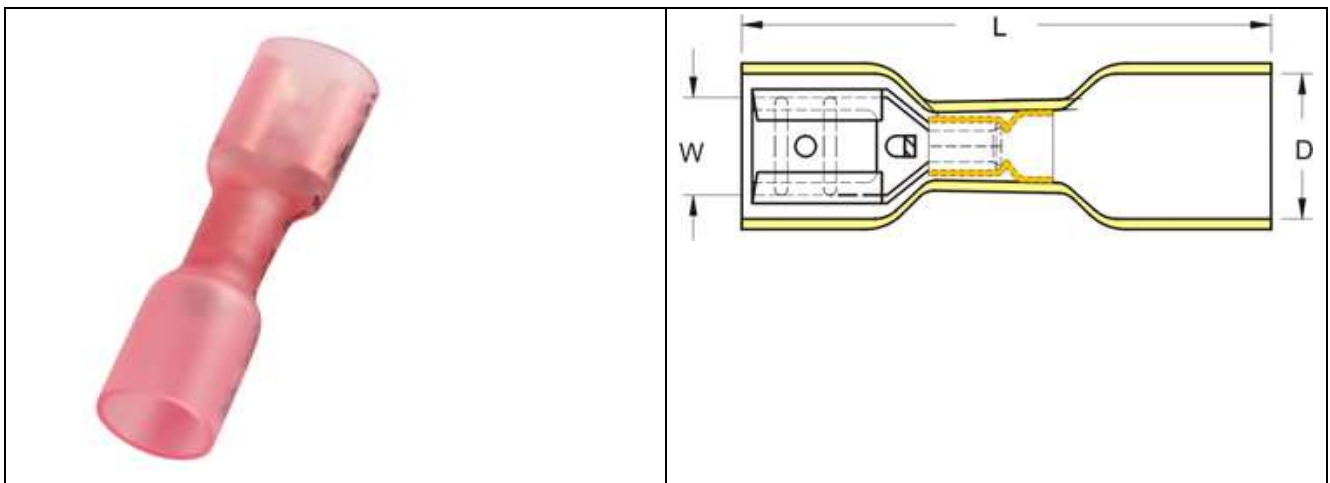

WIRE RANGE A.W.G. mm ²	NEMA TAB	DIMENSION inch(mm)		
		W	D	L
22-16 A.W.G. 0.5-1.5 mm ²	.032X.250 0.8X6.35	0.26 6.6	0.256 6.500	1.102 28