

Datasheet

RS PRO 250 TYPE NON-INSULATED FEMALE DISCONNECTORS (LOOSE TYPE)

Stock number: **2055307**


MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20
AMP.	9	12

TERMINAL MATERIAL: BRASS

TERMINAL SURFACE TREATMENT: TIN PLATED

THICKNESS: 0.4MM

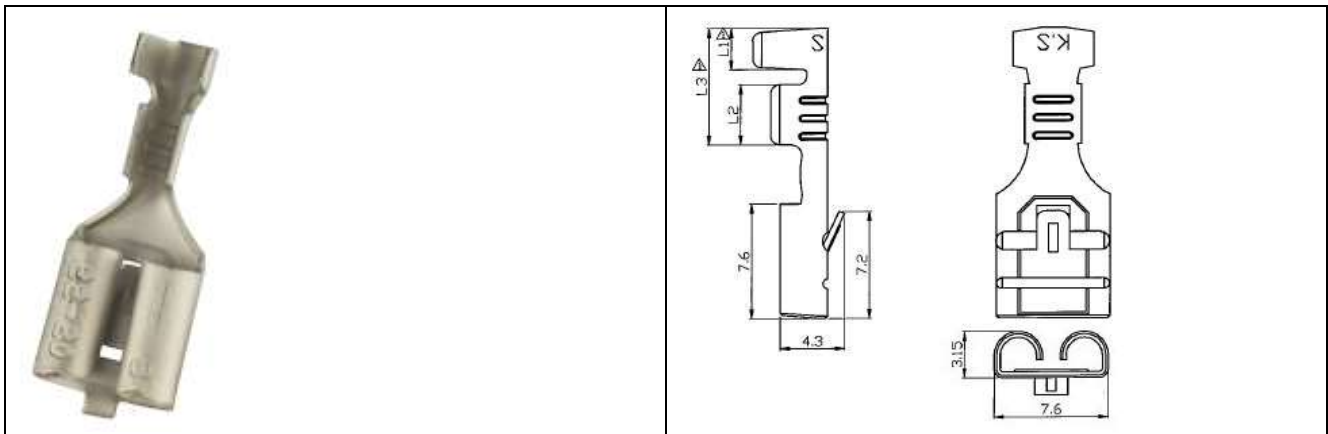

WIRE RANGE A.W.G. mm ²	NEMA TAB	DIMENSION (mm)					MATERIAL	PLATINGS
		W	F	L	H	T		
22- 20 A.W.G. 0.5-0.8 mm ²	.250 x .032 (6.35 x 0.8)	7.6	7.6	19.5	3.15	0.4	BRASS	TIN