

#### **FEATURES**

- Wire is un-terminated and partially stripped
- Cable length is 10m
- Insulation Resistance
  >= 100 MΩ
- Brass nickel plated coupling nut

# RS PRO M12 FEMALE CONNECTOR ASSEMBLY 8 PIN 8 WIRE RIGHT ANGLED 10m 0.25 sq. mm PVC SHIELDED BLACK CABLE

RS Stock No.: 2500630



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



# Product Description ATTRIBUTE 1

## M12 Single Ended Cable Assembly

Brought to you under the trusted RS Brand, this range of M12 connector cable assemblies are commonly used in sensor and automation equipment. Boasting a high degree of environmental protection, they are ideal for industrial use. Fitted with a secure coupling nut, these RS M12 Connector Cable Assemblies are left un-terminated and partially stripped at one end, and are an ideal solution for when secure and reliable data transference is needed.

#### **Features and Benefits:**

- · Wire is un-terminated and partially stripped
- Insulation Resistance >= 100  $M\Omega$
- Neoprene O-Ring
- Brass nickel plated coupling nut

#### **General Specifications**

Rated Operational Voltage	30 V
Current Rating	2A
Insulation Resistance	>= 100 MΩ
Temperature Range	-25°C +75°C
Tightening Torque	0.6 Nm
Coding	A-Coded

#### **Material Specifications**

Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Flash
Contact Carrier	Nylon 66
O-Ring	Neoprene
Grip Color	Black
Coupling Nut	Brass Nickel-Plated

#### **Cable Specifications**

Cable Length-L	10 m
Cable Type	8 Core PVC Shielded Multi Strand
Sheath Color	Black

## RS PRO M12 SINGLE ENDED CABLE ASSEMBLY



Cross Section of Wire	0.25 sq. mm
Core Dia	1.3 mm
Cable Dia	6.0 ± 0.1 mm
Shield Details	Braiding (80%)
Termination	Partially Stripped

## **Protection Category**

Degree of Protection	ID67
Degree of Protection	IPO/


#### **Additional Information**

Custom Tariff Number	85369090	

### **Approvals**

Standards Met	IEC 61076-2-101

## Connection Diagrams / Assembly Diagrams / Illustrations / Accessories

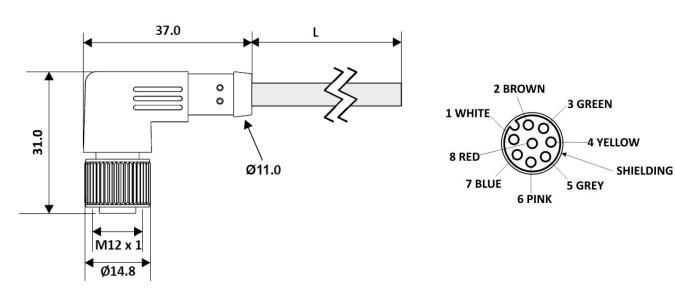

All Dimensions are in mm.