


Datasheet

RS PRO 6 CORE SEMICONDUCTOR MICROPHONE CABLE 100M

Stock No: 2075325

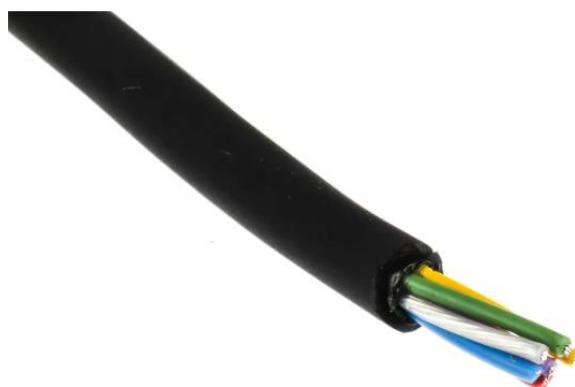


Technical Specifications:

Conductor	Tinned Copper	Filler	Cotton Rope
Cores Number	6C	Insulation 2 Material	Semi-Conductive PE
Size(mm²)	0.22	Insulation 2 Color	Black
Construction(±0.008mm)	7/0.20	Ave Thickness(mm)	0.30
Stranded Dia.(mm)	0.60	Min Thickness(mm)	0.24
Insulation 1 Material	PE	Insulation 2 Dia.(±0.15mm)	4.00
Insulation 1 Color	Natural,BU,RD,YL,GN,VI	Jacket Material	PVC
Ave Thickness(mm)	0.25	Jacket Color	Black
Min Thickness(mm)	0.20	Ave Thickness(mm)	0.50
Insulation 1 Dia.(±0.10mm)	1.10	Min Thickness(mm)	0.40
Drain wire(±0.008mm)	7/0.20 Tinned Copper	Outer Dia(±0.15mm)	5.20
Cabling	Yes		

Features & Benefits:

- Operating temperature: -20~+70 °C
- Conductor resistance(20°C Ω/km): 92 max.
- Insulation DC Resistance(20°C MΩ*Km): 200min.
- Operating voltage: 60 V

Cross Section drawings



Cable Marking: RS PRO 6 Core×0.22mm²
Microphone Cable 60V

Applications:

This multicore microphone cable can be soldered to standard jack and XLR connectors to make custom audio cables that can connect microphones and instruments to mixers or amplifiers. This high-quality audio cable is suitable for; Live stages and theatres Professional studio setups Hobbyist and custom audio setups.