


REF : EV6R n 24 B

TRANXALARM® solid alarm cable

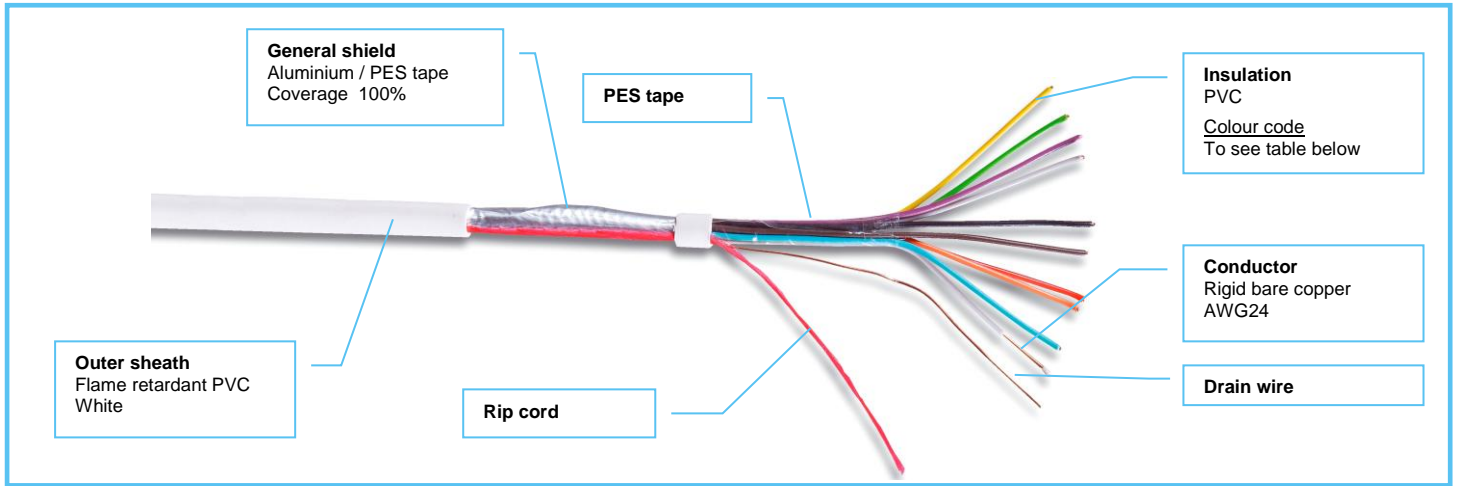

PRODUCTS INFORMATIONS

Application

The EV6R serie is composed of rigid multi-conductors cables.

Electrical properties

Working voltage :	200 V
Test voltage :	1200 V
Conductors resistance at 20°C :	96 Ω/km

Characteristics



Flame behaviour :
IEC 60332-1 or NF C 32-070 Cat C2



Temperature range :
- 10°C → + 70°C



Minimum bending radius :
12 x Ø







According to RoHS standard

REF : EV6R n 24 B

TRANXALARM® solid alarm cable

Products references

			
EVR 4.24 B	4 x AWG 24/1	3.6	23
EVR 6.24 B	6 x AWG 24/1	4.0	33
EVR 8.24 B	8 x AWG 24/1	4.4	49
EVR 10.24 B	10 x AWG 24/1	5.0	58
EVR 12.24 B	12 x AWG 24/1	5,2	65
EVR 14.24 B	14 x AWG 24/1	5.4	73
EVR 20.24 B	20 x AWG 24/1	6.0	110

Insulation colour code

1	White	11	Dark blue
2	Red	12	Pink
3	Yellow	13	White / Brown
4	Green	14	White / Violet
5	Grey	15	White / Green
6	Orange	16	White / Blue
7	Light blue	17	White / Grey
8	Brown	18	White / Yellow
9	Violet	19	White / Black
10	Black	20	White / Red