



82 92 % 87 % 83 % 81 %

17.9 W 0.230 A

28 °C

No

MASTER PL-C 2 Pin

MASTER PL-C 18W/840/2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


| General information | | Colour Rendering Index,horiz (Nom) | | |
|--------------------------------------|-----------------------|------------------------------------|--|--|
| Cap base | G24D-2 [G24d-2] | LLMF 2000 h Rated | | |
| Life to 10% failures (nom.) | 6500 h | LLMF 4000 h Rated | | |
| Life to 50% failures (nom.) | 10000 h | LLMF 6000 h Rated | | |
| LSF 2000 h Rated | 99 % | LLMF 8000 h Rated | | |
| LSF 4000 h Rated | 98 % | | | |
| LSF 6000 h Rated | 92 % | Operating and electrical | | |
| LSF 8000 h Rated | 78 % | Power (Rated) (Nom) | | |
| | | Lamp current (nom.) | | |
| Light technical | | | | |
| Colour Code | 840 [CCT of 4,000 K] | Temperature | | |
| Lamp Luminous Flux 25°C EL (Nom) | 1200 lm | Design temperature (nom.) | | |
| Lamp Luminous Flux (Nom) | 1200 lm | | | |
| Colour Designation | Cool White (CW) | Controls and dimming | | |
| Colour Temperature, horizontal (Nom) | 4000 K | Dimmable | | |
| Lamp Luminous Efficacy EM (Nom) | 67 lm/W | | | |

MASTER PL-C 2 Pin

| Mechanical and housing | | | | |
|------------------------------------|------------------------------------|--|--|--|
| Cap-base information | 2P | | | |
| | | | | |
| Approval and application | | | | |
| Mercury (Hg) content (nom.) | 1.4 mg | | | |
| Energy consumption kWh/1,000 hours | 22 kWh | | | |
| | | | | |
| Product data | | | | |
| Full product code | 871150064272100 | | | |
| Order product name | MASTER PL-C 18W/840/2P 1CT/5X10BOX | | | |
| | | | | |


| EAN/UPC – product | 8711500642721 | |
|-----------------------------------|-----------------------|--|
| Order code | 927905784001 | |
| SAP numerator – quantity per pack | 1 | |
| Numerator – packs per outer box | 50 | |
| SAP material | 927905784001 | |
| Net Weight (Piece) | 57.800 g | |
| ILCOS code | FSQ-18/40/1B-I-G24d=2 | |
| | | |

Dimensional drawing




MASTER PL-C 18W/840/2P 1CT/5X10BOX

Photometric data

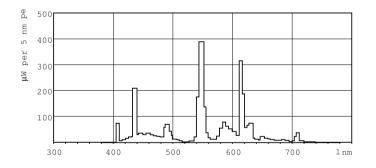

LDPB_PLC2P_840-Spectral power distribution B/W


| Product | D (max) | D1 (max) | A (max) | B (max) | C (max) |
|------------------------|---------|----------|----------|----------|----------|
| MASTER PL-C 18W/840/2P | 27.1 mm | 27.1 mm | 109.5 mm | 128.0 mm | 150.4 mm |
| 1CT/5X10BOX | | | | | |

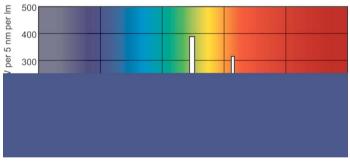




MASTER PL-C 2 Pin


Lifetime

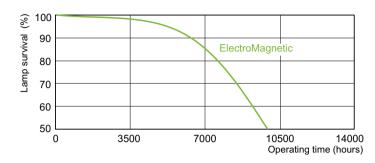



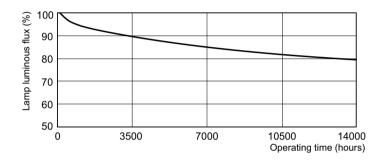

LDLM_PLC2P_0001-Lumen maintenance diagram



LDLE_PLC2P_0002-Life expectancy diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.