


Datasheet

Snap Mounting Outlet

RS Stock 896-2117



Dimensions: (mm)

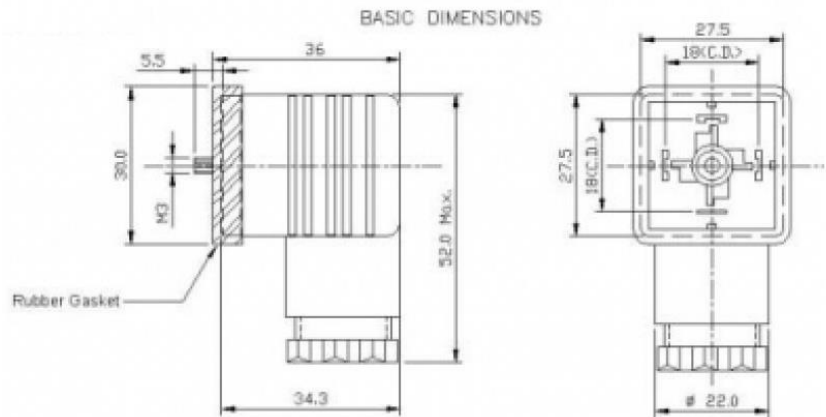

Specifications

| | |
|--------------------------------------|--|
| Connection Type: | 3 Pole + Earth |
| Voltage: | 12 VDC / 24 VDC / 48 VDC / 110 VDC / 250 VDC / 110 VAC / 250 VAC |
| Approvals: | NA |
| Standard: | NA |
| Mounting: | Screw Type |
| Type: | HD-Socket (HI-DOME) – Illuminated |
| Socket Type: | Type A |
| DC V Range: | 12,24,48 |
| Mounting: | M3 Screw |
| Material For Rubber Gasket: | Nitril / Silicon |
| Material Body: | Polycarbonate |
| Gland Size: | PG-9 |
| Body Colours: | Transparent Body |
| Contact Resistance: | 20m Ohms max |
| Current Carrying Parts: | Copper alloy / Tin plated |
| Permissible Temp. With/Without Load: | 0ï¿½C to 90ï¿½C |
| Rating: | 10A 110VAC, 230VAC |
| Terminals: | Screw-type |
| H.V Breakdown Test: | 2 KV AC For 1 Minute |
| Insulation Resistance: | 100 M Ohms min. |