


# ENGLISH


# Datasheet Connector Assembly

RS Stock 877-1072



### **Dimensions: (mm)**

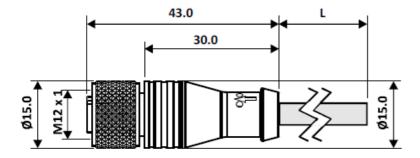



RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.



### **Specifications**

#### **General Specification**

Rated Operational Voltage	60 V	
Current Rating	4A	
Insulation Resistance	>= 100 MΩ	
Temperature Range	-25°C +75°C	
Degree of Protection	IP67	

#### **Material Specification**

Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Plated
Contact Carrier	Nylon 66
O-Ring	Neoprene
Grip Colour	Black
Coupling Nut	Brass Nickel-Plated

#### **Cable Specification**

Cable Length-L	5 m
Cable Type	5 Core PVC Multi Strand
Sheath Colour	Black
Cross Section of Wire	0.34 sq. mm
Core Dia	1.3 mm
Cable Dia	5.5 ± 0.1 mm
Termination	Partially Stripped

# ENGLISH

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.